U.S. DEPARTMENT OF COMMERCE National Technical Information Service


AD-A033 819

PREDICTIVE ANALYSIS OF DISSOLVED OXYGEN IN DICKEY LAKE, MAINE

ARMY ENGINEER WATERWAYS EXPERIMENT STATION VICKSBURG, MISSISSIPPI

DECEMBER 1976





MISCELLANEOUS PAPER Y-76-7

PREDICTIVE ANALYSIS OF DISSOLVED OXYGEN IN DICKEY LAKE, MAINE

Ь

Kent W. Thornton

Environmental Effects Laboratory
U. S. Army Engineer Waterways Experiment Station
P. O. Box 631, Vicksburg, Miss. 39180

December 1976 Final Report

Approved For Public Release; Distribution Unlimited



Prepared for U. S. Army Engineer Division, New England Waltham, Massachusetts 02154

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE,
U. S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

ADA 033819

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (Whon Date Entered)

REPORT DOCUMENTATION	READ INSTRUCTIONS BEFORE COMPLETING FORM				
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER			
Miscellaneous Paper Y-76-7					
4. TITLE (and Subtitle)		5. TYPE OF REPORT & PERIOD COVERED			
PREDICTIVE ANALYSIS OF DISSOLVED O	Final report				
IN DICKEY LAKE, MAINE	6. PERFORMING ORG. REPORT NUMBER				
7. AUTHOR(a)		8. CONTRACT OR GRANT NUMBER(*)			
Kent W. Thornton					
9. PERFORMING ORGANIZATION NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS			
U. S. Army Engineer Waterways Expe	riment Station				
Environmental Effects Laboratory	0180				
P. O. Box 631, Vicksburg, Miss. 3	9180	12. REPORT DATE			
II C Assure Physica Principles New Y	13	December 1976			
U. S. Army Engineer Division, New 1 Waltham, Mass. 02154	England	13. NUMBER OF PAGES			
14. MONITORING AGENCY NAME & ADDRESS(If different	t from Controlling Office)	15. SECURITY CLASS. (of this report)			
		Unclassified			
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE			
16. DISTRIBUTION STATEMENT (of this Report)					
		1			
Approved for public release; distr	ihution unlimite	d ()			
inpriored for passive regarde, albert	zodoo dizzinzoo.				
		7 6 1			
17. DISTRIBUTION STATEMENT (of the abstract entered	in Black 20, if different fro	m Report)			
		3 5			
18. SUPPLEMENTARY NOTES					
19 KEY WORDS (Continue on reverse side if necessary and identify by block number)					
Dickey Lake					
Dissolved oxyg.a					
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)					
Dickey Lake is a northern Maine	e impoundment pro	oposed by the U.S. Army Engi-			
neer Division, New England. Project purposes are peaking power generation					
(including pumpback operation), flood control, and general recreation. The pur-					
pose of the present study was to pr	rovide informatio	on on the expected dissolved			
oxygen (DO) regime in Dickey Lake. Two approaches were used to in-	vesticate the eve	pected DO regimes. The first			
Two approaches were used to in	ACOUTEGON 2016 GX	(Continued)			

DD 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLET

Unclassified
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

1


SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (Continued)

approach was a comparison of the temperature and DO regimes found in 25 lakes located in Maine, Vermont, New York, and Quebec, Canada. An attempt was made co select lakes that had similar depths, surface areas, and geographic locations with respect to Dick y Lake. This information was used to project the DO regime expected in the far field in Dickey Lake, out of the direct influence of the pumpback jet, and to arrive at general conclusions concerning some of the coves and embayments. The second approach was an attempt to band the DO expected during the incremental filling period. This was accomplished by selecting appropriate benthic and water oxygen uptake rates from the literature and calculating the potential hypolimnetic DO concentrations at the end of the summer stratification period.

Based on a comparison of the 25 lakes, Dickey Lake is expected to be a dimictic, holomictic lake that freezes over during the winter. The far-field DO in Dickey Lake after stabilization is expected to be near saturation in the epilimnion and at or above 6 mg/l in the hypolimnion at the end of the summer stratification period. The DO may be lower in the coves and embayments, approaching 2 mg/l at isolated times in the hypolimnion of the shallower coves, depending upon mesoclimatological events.

Dickey Lake is expected to have 5 mg/L of DO in the hypolimnion by the second year after complete filling and possibly earlier. During the filling period, the reservoir may become meromictic, but it is expected to be holomictic after pumpback operations begin. The reservoir is expected to stabilize in 6 to 9 yr after filling.

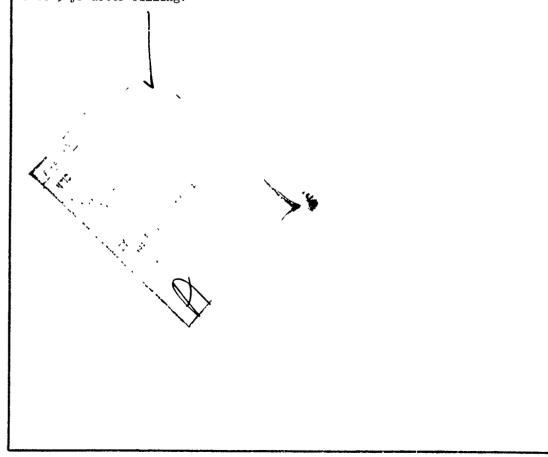

PREFACE

The work described in this report was performed by the U. S. Army Engineer Waterways Experiment Station (WES), Vicksburg, Mississippi, for the U. S. Army Engineer Division, New England (NED). The project was authorized by Intra-Army Order for Reimbursable Services No. 76-C-T-017 dated 24 September 1976.

This report describes a preliminary evaluation of the dissolved oxygen (DO) regime that might be expected in the proposed Dickey Lake. It is intended to provide information for the environmental impact statement and feature water-quality design memorandum. It does not represent a complete or comprehensive analysis of DO in the proposed Dickey Lake. Some areas of interest could not be evaluated with the existing data base or within the time frame of this study.

The project was undertaken by the Environmental Effects Laboratory (EEL) at the WES. The research was conducted under the direct supervision of Mr. D. L. Robey, Chief, Ecosystem Modeling Branch, and under the general supervision of Drs. R. L. Eley, Chief, Ecosystem Research and Simulation Division, and John Harrison, Chief, EEL. Pr. K. W. Thornton served as principal investigator.

Messrs. Richard DiBuono and Richard Cassidy, NED, provided information throughout the study and, along with Mr. David Buelow, assisted in data collection, provided thermal simulations of Dickey Lake, and reviewed the study. Messrs. D. G. Fontane and M. S. Dortch, Hydraulics Laboratory, WES, provided information on the structural design of the dam and outlet works, hydrodynamic3 during operation, and reviewed the study. Dr. D. E.

Ford and Mr. Robey, EEL, provided assistance throughout the course of the study.

Data on the study lakes were provided by Dr. Ray Oglesby, Department of Natural Resources, Cornell University; Dr. E. Bennett Henson,

Department of Zoolcgy, University of Vermont; Mr. Matthew Scott, Department of Environmental Protection, State of Maine; and the Ouebec Province Service of Water Quality, Quebec, Canada.

Director of the WES during the preparation and publication of this report was COL J. L. Cannon, CE. Technical Director was Mr. F. R. Brown.

CONTENTS

						Page
PREFACE				•	•	iii
LIST OF FIGURES	•	•	•	•	•	vi
LIST OF TABLES			•	•		vi
INTRODUCTION			•	•		1
COMPARISON OF DO IN SURROUNDING LAKES	•		•	•		2
HYPOLIMNETIC OXYGEN DEFICITS DURING FILLING		•	•			9
COVES AND EMBAYMENTS			•			16
DISCUSSION	•	•				17
CONCLUSIONS				•		24
LITFRATURE CITED				•		25
APPENDIX A: TEMPERATURE AND DO DATA FOR 25 STUDY LAKES						

LIST OF FIGURES

Figure		Page
1	Location of Dickey Lake (No. 1) and 25 study lakes	4
2	Monthly DO and temperature bands between maxima and minima values for the 25 study lakes	6
3	Monthly DO means and standard errors for the 25 study lakes	7
4	Thermocline depth as a function of surface area	11
5	Oxygen uptake rates applied to different zones during incremental filling	14

LIST OF TABLES

<u>Table</u>		
1	Morphometry of Dickey Lake and 25 Study Lakes	29
2	Study Lakes and Data Sources	30
3	Oxygen Uptake Rates from Literature	31
4	Potential Hypolimnion Oxygen Values during Incremental Filling	32
5	Duration of Stabilization Period in Uncleared Reservoirs	33

PREDICTIVE ANALYSIS OF DISSOLVED OXYGEN IN DICKEY LAKE, MAINE

Introduction

Knowledge of the dissolved oxygen (DO) in a body of water provides as much information about the system as any other single variable (Hutchiason, 1957). Since DO concentrations integrate as well as regulate many of the biological and chemical phenomena that occur in a water body, it is important to analyze changes that occur in the DO regime throughout the year in a lake or reservoir. These changes become especially important when a part of the system becomes isolated. During thermal stratification, the hypolimnion in a natural lake effectively becomes isolated from gaseous exchange with the rest of the lake. Advection resulting from inflows and project operations, however, may result in aerated water entering the hypolimnion of a reservoir. Since diffusion of gases in water is a slow process, the lake must circulate to maintain an equilibrium with atmospheric oxygen (Wetzel, 1975). Changes that occur in the hypolimnetic DO during this period may significantly affect lake or reservoir water quality and biota. It is important, therefore, for many activities and operational and management objectives to be able to predict the DO regime that will exist in a water body throughout the year.

Dickey Lake is a proposed impoundment on the Saint John River in northern Maine. The impoundment proposed by the U. S. Army Engineer Division, New England (NED), would extend 75 km upstream behind a 102.1-m-high dam. Project purposes include peaking power generation (including pumpback operation), flood control, and general recreation.

Specific morphometric characteristics of the proposed Dickey Lake are listed in Table 1. If constructed, Dickey Lake would become the second largest and deepest lake in New England. Lake Champlain would be its only sovereign (Cassidy, 1975).

The Dickey Lake project is presently in the preconstruction planning phase. During the preparation of the environmental impact statement and the feature water-quality design memorandum, questions arose concerning the DO regime expected in Dickey Law. This report presents an analysis of the DO concentrations projected to occur in the proposed Dickey Lake.

The report is divided into four areas. The first part is a comparison of DO and temperature regimes in northeastern North American lakes. This approach was used to obtain an estimate of the DO and temperature regime expected after stabilization if Dickey Lake is constructed. The second part consists of predictions of potential hypolimnetic DO concentrations during the filling period. Various oxygen uptake rates were used to calculate a band of possible DO values. The third part discusses possible DO and temperature regimes within the coves and embayments. The fourth part elaborates on several of the assumptions implicit in analysis of DO in this study.

Comparison of DO in Surrounding Lakes

DO data were obtained from several sources on a total of 25 lakes located in Maine, Vermont, New York, and the province of Quebec, Canada. Specific morphometric characteristics of the lakes and sources of information are listed in Tables 1 and 2, respectively. The approximate locations

of the lakes are shown in Figure 1. An attempt was made to include lakes of similar depth, surface area, and geographic location with respect to Dickey Lake. Several lakes were much smaller and shallower than Dickey Lake but were included because of similar geographic location and because data from the lakes would provide some insight into the potential behavior of some of the coves in Dickey Lake.

The water bodies included in the analyses are natural lakes since there are no large reservoirs the size of Dickey Lake in the Northeast. Moosehead Lake and Lake Aylmer both have had dams added to raise their pool elevation for power production, but a natural lake was in existence prior to the structural addition. Although Dickey Lake will be a reservoir and not a natural lake, the analysis was to be conducted for the Sar field, out of the direct influence of the pumpback jet, and thus the comparison with natural lakes should result in a reasonable estimate of DO for the reservoir. The theoretical residence times of several of the lakes are also comparable with Dickey Lake and add support to the comparison. Bailey (1975) determined the residence time of Embden Pond to be 3.6 yr, while the U. S. Environmental Protection Agency (1975) determined the residence times for Champlain, Moosehead, Rangeley, Sebago, Cayuga, and Long Lakes to be 2.6, 3.0, 2.8, 5.4, 11.2, and 3.2 yr, respectively. The theoretical residence time for Dickey Lake was calculated to be 2.3 yr. The long residence time should lessen the effects of inflow-outflow dynamics on the overall DO balance in the pool. Eley (1970) found that inflow and outflow accounted for less than 1 percent of the daily gains and losses of DO, respectively, in

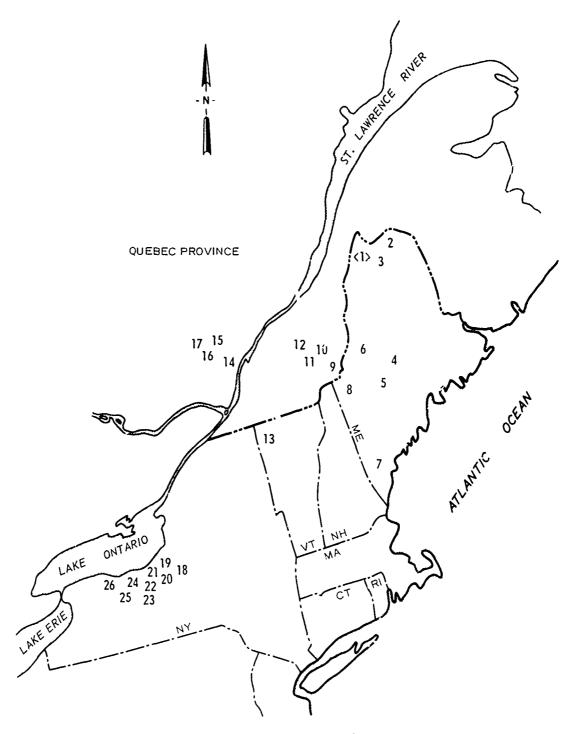


Figure 1. Location of Dickey Lake (No. 1) and 25 study lakes. See Table 1 for lake names corresponding to the numbers shown on the map

the Cimarron Arm of Keystone Reservoir, Oklahoma. Keystone Reservoir had a theoretical retention time of only 20 days and an observed residence time of 6 to 48 days. It is expected, therefore, that biological and chemical processes and atmospheric exchanges will dominate the overall DO balance in the proposed Dickey Lake.

Temperature and DO data for the 25 study lakes have leen tabulated by date and depth in Appendix A. Composites of these data are presented in Figures 2 and 3. Temperature and DO maxima and minima are displayed in Figure 2 to provide an indication of the range of temperatures and DO concentrations that have been recorded in these lakes. The monthly DO means and standard errors are plotted in Figure 3 to provide an estimate of average DO concentrations that have been recorded for the study lakes.

Aerobic conditions were found at all depths for all times of the year in all 25 study lakes (Figure 2). The DO concentrations ranged from 1.7 to 15.7 mg/k (Figure 2). On the average, however, DO concentrations rarely decreased below 7 mg/k for all months of the year (Figure 3). The greatest variation appeared in depths of 50 m or less and reflected the inclusion of several of the smaller, shallower lakes and, possibly, metalimnetic DO demand in the larger lakes.

The hypolimnetic DO concentrations below 50 m, in general, were above 6 mg/ ℓ throughout the year within a relatively narrow range (Figure 2). Hypolimnetic DO concentrations average between 10 to 12 mg/ ℓ during the first half of the year and between 8 to 10 mg/ ℓ during the second half of the year (Figure 3). The DO dropped to 3.4 mg/ ℓ at 120 m in Cayuga Lake on 8 July 1972, but was recorded at 7.8 mg/ ℓ at the same depth and

and the second second contractions and the second contraction of the second second second second second second

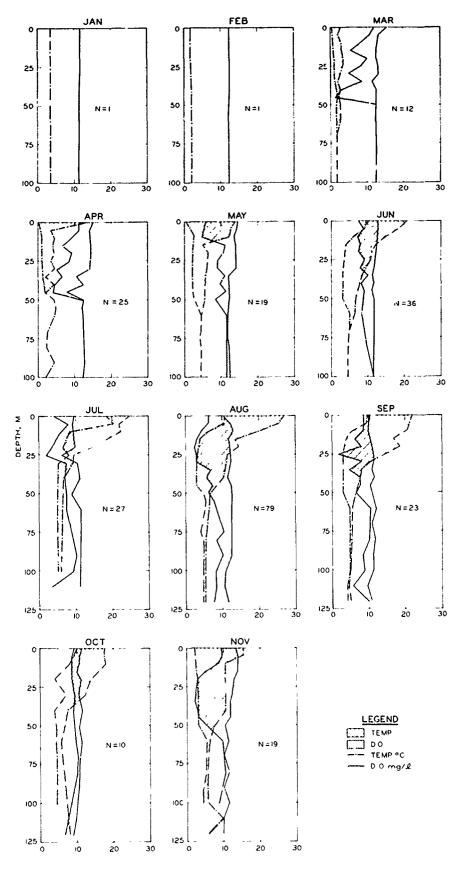


Figure 2. Monthly DO and temperature bands between maxima and minima values for the $25\ \text{study}\ 1\text{akes}$

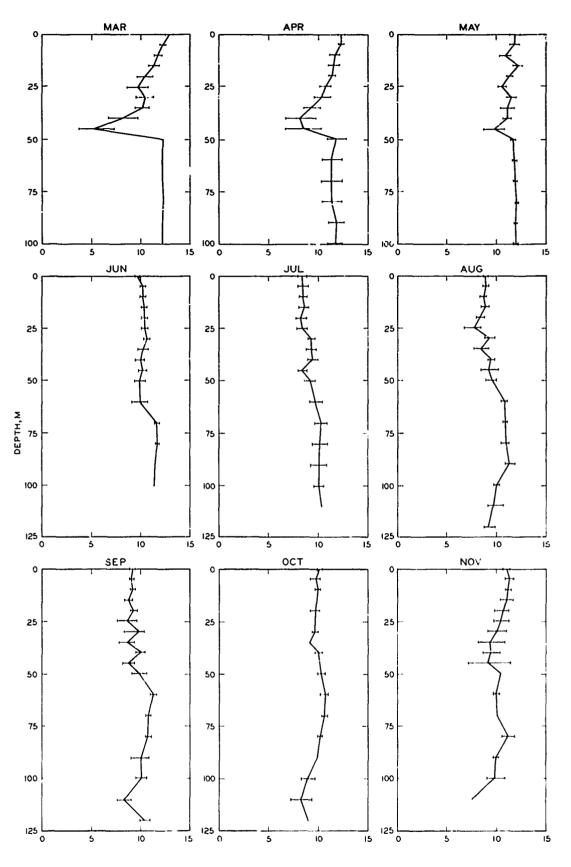


Figure 3. Monthly DO means and standard errors for the 25 study lakes

location on 2 August 1972. If one sampled at enough locations through time, it is expected that more of these isolated pockets of low DO would be recorded, but it is questionable how long they would exist before the oxygen deficit was satisfied and they reached equilibrium with the surrounding water. Usually, these deep lakes do not experience low hypolimetic DO. This may be due, in part, to two processes. At the low hypolimentic temperatures, ranging from about 3 to 7°C, biological and chemical activity is reduced and oxygen uptake is low. Secondly, the oxidation of detrital material settling out of the epilimnion can proceed through a relatively large volume so that much of the oxygen demand of this material has been satisfied by the time it reaches the sediment.

The minimum DO concentrations as a function of depth above 50 m were highly variable (Figures 2 and 3). This resulted from the inclusion of shallower, smaller lakes in the analyses. The hypolimnetic DO near the bottom in some of these lakes did decrease to 2 to 3 mg/l and this is reflected in Figure 2. Each minima spike represents the bottom of a specific lake or cove. These spikes occur consistently between 15 to 20 m, 25 to 30 m, and 45 to 50 m, and represent the maximum depths in several of the study lakes. Although the hypolimnetic temperatures rarely increased above 10°C at depths of 30 m or greater, the volume of the hypolimnion in these lakes was not as great as in the deeper lakes. Much of the oxygen demand of the detritus probably remained to be satisfied after it reached the sediment, resulting in the lower DO concentrations in these shallower lakes. Surface DO concentrations ranged from 4.5 to 15.7 mg/l throughout the year (Figure 2). The surface concentrations, on the average,

were at or near saturation (Figure 3). At various times of the year, primary production of oxygen exceeded community respiration and the epilimnion became supersaturated with DO. However, at other times, community respiration of oxygen exceeded primary production and DO values were less than saturation. The range of DO concentrations for the study lakes was greater in the epilimnion than in the hypolimnion for two major reasons. First, less oxygen can be dissolved in water at higher temperatures, and second, biological consumption of oxygen per unit time probably was increased at the higher temperatures.

In Lake Champlain, the DO minima did not occur in the hypolimnion but in the metalimnion. Metalimnetic DO minimums occurred several times throughout the season (Henson, personal communication). The effective settling rate of epilimnetically produced organic matter decreased as it entered the metalimnion because of the density gradient; at the temperatures of the metalimnion, the readily oxidizable organic matter was decayed. This reduced the oxygen content of the metalimnion and resulted in a more stable organic compound entering the colder hypolimnetic waters where it was more slowly degraded. This resulted in lower oxygen consumption per gram of organic matter per unit time in the hypolimnion. Minimal hypolimnetic oxygen concentrations were about 7 mg/l near the end of the summer stratification period in Lake Champlain.

Hypolimnetic Oxygen Deficits during Filling

It is important to estimate the DO regime expected during the filling period and the stabilization period following filling as the reservoir approaches a steady-state condition. To assess these conditions, several assumptions were made.

It was assumed that epilimnetic DO concentrations will remain near saturation due to biological oxygen production, mixing, and circulation of the epilimnion. Luring the first year of filling, however, the epilimnion may be undersaturated due to benthic demand (Falter et al., 1973).


Ford (1976) found the depth to the thermocline during thermal stratification could be related to lake surface area (Figure 4). For lakes with surface areas of about 100 km² or greater, the thermocline depth was roughly constant at 18 m. This implies lakes with surface areas greater than 100 km² will have similar epilimnetic depths. This conclusion is also generally supported by data from several lakes that were included in this study as shown below.

Lake	Surface ₂ Area, km	Thermocline Depth, m*
Cayuga	172	20.0
Moosehead	303	15.2
Sebago	116	16.1

^{*} Values calculated during late August or early September to reflect period of strong stratification.

Since Dickey Lake will have a surface area of 93 km² at the end of the first year of the filling process, the thermocline depth or point of the maximum density gradient was assumed to exist at approximately 18 m.

Since this depth also represents the point of minimal mixing, the hypolimnion was assumed to begin 18 m below the surface for all computations. The approximate hypolimnetic depths, areas, volumes, and changes in areas and volumes associated with the incremental fillings, therefore, would be as follows:

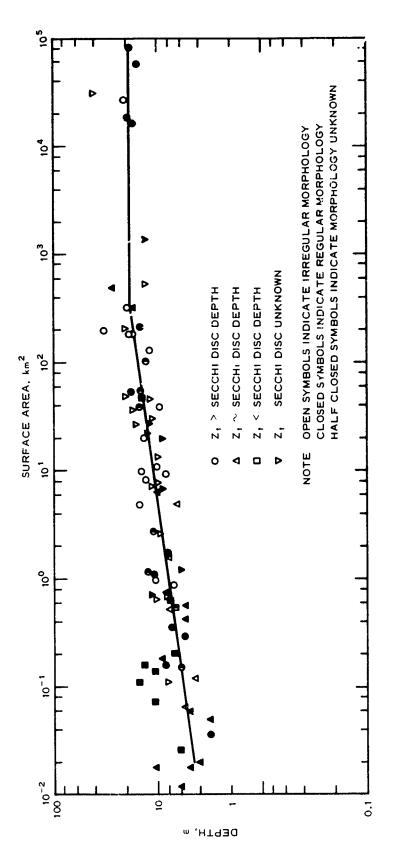

Ġ

Figure 4. Thermocline depth as a function of surface area

	· · · · · · · · · · · · · · · · · · ·	Hypolimnion				
Time of Filling	Elevation m	Depth m	Area km ²	Δ Area km ²	Volume 10 ⁹ m ³	Δ Volume
1st spring	221.0	44.2	55.64		0.99	
2nd spring	239.9	63.1	94.70	39.05	2.38	1.39
3rd spring	250.8	74.0	132.54	37.84	3.61	1.23
Final spring	259.1	82.3	175.44	42.90	4.85	1.24

Since bottom contours were not available for this study, it was assumed the inundated bottom area was similar in magnitude to lake surface area. The assumption that the surface area was roughly similar to the bottom area is reasonable. An average slope for the sides of Dickey Lake is approximately 7 deg from the horizontal. This slope will be greater near the dam but less in the headwater area. Ignoring surface irregularities, this slope will produce bottom areas that are roughly 1.01 times greater than the surface area (Dortch, personal communication).

A literature review produced the oxygen uptake rates expressed as grams of oxygen per square metre of bottom area per day listed in Table 3. With estimates of the bottom area and areal oxygen uptake rates, calculations were made of the potential oxygen demand of inundated bottom material during incremental filling periods. A stratification period of 185 days (15 May-16 November) was chosen based upon analysis of the data tabulated in Appendix A; Brooks and Deevey, 1963; and New York State Electric and Gas Corporation, 1974. An initial DO concentration of 12 mg/ ℓ at the onset of stratification was used.

Three scenarios were developed based upon three different decay rates during each initial inundation. The purpose was to band the potential

oxygen uptake rates and resulting hypolimnetic DO concentrations that might exist in Dickey Lake during the filling process, i constructed. The initial oxygen uptake rates selected were 3.60, 2.40, and 1.23 g/m²/day, which were taken from Stein and Denison, 1966; Edberg and Hofsten, 1973; and McKeown et al., 1968, respectively. The uptake rate of 3.60 g/m²/day was measured in situ for sulfite pulpmill waste in an estuary. This should represent a high rate of uptake due to the continual replenishment of DO and mixing of bottom sedimencs through tidal flushing.

The rate 2.40 g/m²/day was measured <u>in situ</u> in a eutrophic lake that had newly deposited algal layers on the bottom sediment, which should represent readily oxidizable organic matter similar to what might exist at the time of fixst filling. The third rate, 1.23 g/m²/day, represented the peak oxygen demand measured on benthic deposits of wood origin measured under laboratory conditions. This should represent a low rate. Although DO concentrations were maintained, mixing was minimal. These three decay rates were applied each time a new zone was inundated for each of the four years to provide a range of estimates of the DO demand of inundated bottom material (Figure 5).

During the second year of filling, the previously discussed rates were applied to the newly inundated zone. A new oxygen uptake rate of $0.80~\mathrm{g/m}^2/\mathrm{day}$ was applied to the previously inundated bottom zone for all cases since it was assumed the readily oxidizable organic matter had exerted its peak demand during the first year of inundation (Figure 5). This rate represents the average benthic demand from deposits of wood origin in the laboratory (McKeown et al., 1968). During the third and

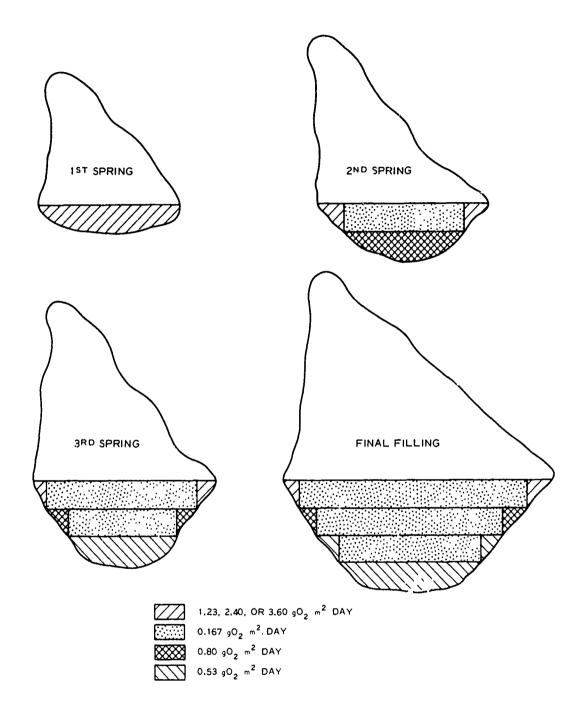


Figure 5. Oxygen uptake rates applied to different zones during incremental filling. Complete hypolimnetic mixing assumed at the end of stratification

fourth years of filling, each of the two previously discussed rates was applied to the next successive zone. The oxygen uptake rate for the zone that had been inundated for two complete years or more was assumed to be 0.53 g/m²/yr (Figure 3). This represents the upper rate used in a DO model of Cayuga Lake (Newbold and Liggett, 1974), and is representative of the rates for lake sediments (Table 3). The rate of 0.53 was the lowest uptake rate used in these calculations.

All of the above rates reflect some oxygen demand from the overlying water as well as the oxygen demand of the bottom matter. The overlying water oxygen demand, however, is generally much less than the bottom demand. To account for the oxygen demand of organic matter dissolved or suspended in the water not directly associated with the bottom, an oxygen uptake rate of 0.167 g $0_2/m^2/day$ was used (Figure 5, stippled area). This rate is the arbitrary upper limit set by Hutchinson (1957) for oligotrophic lakes. Based on the present land use, i.e. forested, and nutrient loading analyses (Cassidy, personal communication), Dickey Lake is expected to be an oligotrophic lake.

The oxygen uptake rates for each zone were used to compute the oxygen demand during the 185-day stratification period. The oxygen remaining or oxygen deficit at the end of the stratification period in each zone was then volume-weighted and averaged over the entire hypolimnion to arrive at an average DO concentration for the hypolimnion.

The results of these three cases are shown in Table 4. Under the highest oxygen uptake rate, the hypolimnion would be anoxic until the end of the third spring of incremental filling. The lower two uptake

rates would result in an aerobic hypolimnion after the second spring of incremental filling. The lowest decay rate would result in a hypolimnion with an average DO of greater than 5 mg/ ℓ after the third spring of incremental filling. At the median oxygen uptake rate, an average DO greater than 5 mg/ ℓ would not occur in the hypolimnion until the second year after complete filling.

It is not possible to predict absolute values with the above approach, but the calculations do indicate that the hypolimnion will have greater than 5 mg/2 of DO by at least the second year of complete filling and possibly earlier.

Coves and Embayments

The Saint John, Little Black, and Big Black Rivers have a total of 64 tributaries that will form major coves in Dickey Lake. These major coves will vary in depth from less than 3 m to over 85 m. In addition, Dickey Lake will have a shoreline development ratio of 8.83, indicative of an extremely irregular shoreline and typical of highly dendritic-shaped lakes. The shoreline development ratio is the ratio of the shoreline length to the length of the circumference of a circle of area equal to that of the lake (Hutchinson, 1957). It is not possible to address each of the major coves expected to be formed in Dickey Lake, let alone the minor coves, based on the present limited data set and limited morphometric and topographic description of Dickey Lake available for this study. Mesoclimate also becomes important in a project as large as Dickey Lake and may be expected to play a significant role in establishing the temperature and

DO characteristics within each cove. With these caveats, it is possible to present general conclusions about those coves that are not hydrodynamically isolated from the main body of the lake.

Those shallow coves that do not stratify during the summer would be expected to be near saturation with DO and somewhat warmer than the inlake epilimnion. Coves that are deep enough to stratify during the summer but that have a relatively shallow hypolimnion (maximum depth of 30 m or less) can be expected to have lower DO concentrations than the in-lake hypolimnions for two reasons: (a) there is initially less volume of the hypolimnion to supply DO for oxygen uptake by bottom materials, and (b) hypolimnetic temperatures probably will be warmer than in-lake temperatures resulting in higher biological activity. This is illustrated in Figure 2. The Do at depths of 30 m or less dropped as low as 1.7 mg/2. Each minima spike represents the DO concentration near the bottom of one of the shallower study lakes. The maximum temperature recorded at 30 m was about 12°C.

Deep coves may be considered as extensions of the main body of the lake and may be expected to exhibit similar DO and temperature regimes.

During the winter, some of the shallower coves may freeze to the bottom. Those coves that do not freeze to the bottom but have shallow water depths may experience low DO concentrations. The deeper coves may have low DO concentrations within the bottom metre but, in general, will probably have higher DO concentrations within the water column.

Discussion

Dickey Lake is predicted to be a dimictic, holomictic reservoir that will freeze over during winter. This is similar to the other Maine and

Canadian lakes (Brooks and Deevey, 1963; Davis et al., 1976; Quebec Service de la qualite des eaux, personal communication). Although Dickey Lake is deep, it is expected to mix completely during the isothermal overturn periods. Brooks and Deevey (1963) state no inland lakes in New England are known to be meromictic. The holomictic assumption is important in satisfying hypolimnetic oxygen deficits at the end of the stratification period.

In general, mixing is expected to be more prevalent in the hypolimnion during stratification in Dickey Lake than in natural lakes. Withdrawal and pumpback operations should result in internal currents within
the hypolimnion and could produce additional mixing since the cycling of
the pumpback and withdrawal operations is expected to create internal
waves and currents. Due to reflection and movement of these currents,
the hypolimnion should remain fairly well mixed and distribute DO supplies and demands rather uniformly throughout the volume.

The DO concentrations in deep northeastern lakes rarely decrease below 6 mg/ ℓ in the hypolimnion during the summer stratification period. Wright (1969) calculated an average oxygen depletion rate of 1 mg/ ℓ /month for Cayuga Lake. A DO value of 12 mg/ ℓ at the onset of stratification. therefore, would result in a value of 6 mg/ ℓ at the end of the stratification period in Cayuga Lake (Wright, 1969). DO values are generally higher than 6 mg/ ℓ in Cayuga Lake, however. Potash and Henson (1975) found that DO concentrations 1 m from the bottom at the end of the summer stratification period in Lake Champlain rarely fall below 65 percent of saturation (about 7.8 mg/ ℓ).

DO concentrations in Dickey Lake are expected to remain high in the hypolimnion during the winter stratification period. Before complete surface freezing and snow cover, convective currents may continually mix the lake and replenish any oxygen deficits. After freezing and snow cover, low temperatures will reduce biological and chemical oxidation of organic matter. Deep Canadian lakes that have a typical clinograde oxygen curve during summer stratification do not develop the same type of curve during winter stratification (Ministry of Natural Resources, personal communication). In these lakes, the hypolimnetic DO remains high to within a few metres of the bottom. Within these few bottom metres only, the DO concentration decreases rapidly toward the sediment-water interface (Ministry of Natural Resources, personal communication). DO concentrations at the mudwater interface may range from 0- to 15-percent saturation near the end of winter stratification (Hutchinson, 1957).

Land in the upper Saint John River drainage basin is presently classified as forested with very little agriculture and essentially no urban area. Land-use patterns around many of the other deep northeastern lakes such as Cayuga, Seneca, Champlain, Sebago, etc., include urban, agricultural, open, and forested areas. These lakes, however, retain high hypolimnetic DO concentrations during the summer stratification period. It is expected, therefore, that changes in the land use of the drainage area such as moderate increases in agriculture will have little impact on hypolimnetic DO within the foreseeable future.

Several assumptions were made for analysis of the DO during the filling period. The oxygen uptake rates were assumed to be constant

during the entire stratification period. This probably resulted in an overestimate of the oxygen demand since oxygen uptake rates diminish with decreasing oxygen concentrations (Hargrave, 1969; Edwards and Rolley, 1965). The average oxygen uptake rate for oxidizable organic matter of wood origin was reduced from 0.80 to 0.38 g/m²/day after continual exposure in the laboratory at 20°C (McKeown et al., 1968). It is expected that this decay would occur more slowly at 5 to 7°C, but there would be some gentle mixing in the field that would expose more surface area and replenish the oxygen supply. A reduction in the oxygen uptake rates during successive years of filling is expected and was, therefore, reflected in the analysis.

The stratification period of 185 days or from 15 May to 16 November is consistent with observed data (Appendix A). Stratification dates observed by New York Electric and Gas Corporation (1974) in Cayuga Lake from 1950 to 1972 were as follows:

	Date of Permane	ent Stratification
<u>Year</u>	Started	Ended
1950	*	12 Dec - 1 Jan**
1951		13 Nov - 31 Dec**
1967		2 Dec
1968		10 Dec
1969	22 May	
1970	21 May	20 Dec
1971	3 May	16 Dec - 21 Dec**
1972	after 10 May	13 Dec

^{*} No data.

^{**} No data between dates given.

The dates given for the end of stratification in Cayuga Lake represented isothermal conditions. However, DO is transferred throughout the hypolimm on before the lake is isothermal. An initial DO concentration of 12 mg/l at the onset of stratification was selected after an analysis of the data on deep impoundments. Wright (1969) also indicated the hypolimnion of Cayuga entered the stratification period in late May or early June with a DO concentration of about 12 mg/l. This represents about 95-percent saturation at the average hypolimnion temperature.

The assumption of complete hypolimnetic mixing is probably not completely valid although intermittent mixing certainly occurs (Hutchinson, 1957). This assumption of complete hypolimnetic mixing was required to calculate the demand on a volume basis by dividing by the volume of the hypolimnion. Water movement in the hypolimnion is expected as a result of internal waves created by generation and pumpback activities. In addition, density currents can be created through the decay of organic matter. The release of dissolved organics into the overlying water strata is sufficient to modify the density of this water and create a current as water moves to reduce the density gradient (Hutchinson, 1957).

Although the oxygen deficit is substantial after the first year of the filling process, this demand may be satisfied through holomixis. A percentage of this deficit will also be satisfied by mixing with the epilimnion. Based on personal communication with Matthew Scott (Maine Department of Environmental Protection), the graph of time for complete ice out for Maine lakes (Brooks and Deevey, 1963), communication with the Ministry of Natural Resources (Quebec province), and analysis of data in

Appendix A, Dickey Lake was assumed to mix for 10 days in the spring prior to stratification and 15 days in the fall prior to freezing. Although lakes with small surface areas may circulate only a few days before stratifying, large lakes often circulate for a period of weeks before stratification occurs (Wetzel, 1975). In the stated time periods, sufficient mixing should occur to satisfy the oxygen demand. With a wind velocity of 5 m/sec over a lake with the surface area of Dickey Lake, vertical velocities in Langmuir convective cells may move at about 4 cm/sec or 3456 m/day (Scott et al., 1969). Theoretically, this would be sufficient to turn Dickey Lake over approximately 17 times a day. During the fall, convective currents would be quite strong because of cooling and will also be important in transporting oxygen from the surface to the bottom. If the entire lake became anoxic at overturn, the flux of oxygen across the surface would be 12.2 $g/m^3/sec$ or 1054 kg/m³/day based on an analysis using the work of Emerson (1975). The flux would diminish at the surface DO concentration approaches that of the air-water interface, but it is clear a substantial quantity of oxygen could be transported to the bottom.

While holomixis was assumed, biogenic meromixis may not be excluded. Dworshak Reservoir, in Idaho, became meromictic during and just following the period of filling (Falter et al., 1973, 1974). This may occur during the filling period in Dickey Lake since the project will not be operated with pumpback during the filling period. It should be noted, however, that Dworshak is nearly twice as deep as the proposed Dickey Lake and has less surface area. It is expected that Dworshak Reservoir would take much longer to completely mix than Dickey Lake and this may have

contributed to the meromictic condition. Once pumpback operations begin, it is expected that any chemical stratification that might be established would be destroyed and a holomictic state would be established.

It is expected that the stabilization period for Dickey Lake will be approximately 6 to 9 yr. This stabilization period is typical of many Corps of Engineers impoundments, and depending upon the parameter, is within the duration of the stabilization period found in several other uncleared reservoirs (Table 5). The necessity of reservoir clearing in cold climates is questionable. Campbell et al. (1976) found no significant difference in nutrient or metal releases between stripped and unstripped soils at 1°C. This was not true at 25°C, however. At the higher temperature, soil stripping significantly reduced nutrient and metal releases.

The data presented in Figure 3 may be used to speculate on cove conditions, but it should be used with caution. These data reflect conditions within an entire lake that may respond to meteorological changes very differently than a cove. Coves may also be influenced by the main body of the lake. The generalized statements are also confounded by the proposed annual average drawdown of the pool elevation by 6.1 m. This would expose the bottom in some of the coves, resulting in increased oxidation and mineralization of the organic matter. This might promote algal production upon reflooding by releasing nutrients into the overlying waters. The extent of these releases cannot be determined from existing data.

Conclusions

Based on a comparison of DO profiles in 25 lakes that are similar in geographic location to the proposed Dickey Lake impoundment and on a limited literature review, the following conclusions are considered warranted:

- a. Dickey Lake is predicted to be a dimictic, holomictic lake that will freeze over during the winter.
- <u>b</u>. The DO in Dickey Lake in steady state after stabilization is expected to be near saturation in the epilimnion and at or above 6 mg/l in the hypolimnion at the end of the summer stratification period.
- c. Dickey Lake is expected to have 5 mg/l of DO in the hypolimnion by the second year after complete filling and possibly earlier. During the filling period, the reservoir may become meromictic, but it is expected to be holomictic after pumpback operations begin. The reservoir is expected to stabilize in 6 to 9 yr after filling.
- d. The DO may be lower in the coves and embayments depending upon mesoclimatological events. Dissolved oxygen contents approaching 2 mg/l may be expected at isolated times in the hypolimnion of the shallower coves.

LITERATURE CITED

- Bailey, J. H. 1975. Proposed trophic classification of the great ponds of Maine. Draft.
- Brooks, J. L. and Deevey, E. S., Jr. 1963. New England. <u>In</u> Frey, D. G., Limnology in North America. pp 117-162. University of Wisconsin Press, Madison.
- Campbell, P. G., Bobee, B., Caille, A., Demalsy, M. J., Sasseville, J. L., Visser, S. A., Couture, P., Lachance, M., Lapointe, R., and Talbot, L. 1976. Effets du decapage de la curvette d'un reservoir sur la qualite de l'eau emmagasinee: elaboration d'une methods d'etude et application au reservoir de Victoriaville (riviere Buistrode, Quebec). Rapport Scientifique No. 37. Universite du Quebec, Quebec, Canada.
- Cassidy, R. 1975. Morphology of Dickey Lake. U. S. Army Engineer Division, New England. Office Working Paper.
- Cooper, G. P. 1939. A biological survey of thirty-one lakes and ponds of the upper Saco River and Sebago Lake drainage systems in Maine. Fish Survey Report No. 2. Maine Dept. of Inland Fisheries and Game.
- Cooper, G. P. and Fuller, J. L. 1945. A biological survey of Moosehead Lake and Haymock Lake, Maine. Fish Survey Report No. 6. Maine Dept. of Inland Fisheries and Game.
- Cowing, D. J. and Scott, M. 1976. Limnological data report for the Maine Dept. of Environmental Protection U. S. Geological Survey Cooperative Lake Studies Project. Dept. of Interior. U. S. Geological Survey. Open-file report. June.
- Cowing, D. J. and Scott, M. 1975. Limnological data report for the Maine Dept. of Environmental Protection U. S. Geological Survey Cooperative Lake Studies Project. Dept. of Interior. U. S. Geological Survey. Open-file report. June.
- Davis, R. B., Bailey, J. H., Scott, M., Hunt, G. S., and Norton, S. A. 1976. Comparative limnologic studies and human impacts at seventeen lakes in Maine. In press.
- Edberg, N. and Hofsten, B. V. 1973. Oxygen uptake of bottom sediments studied in situ and in the laboratory. Wat. Res. 7:1285-1294.
- Edwards, R. W. and Rolley, H. L. J. 1965. Oxygen consumption of river muds. Jour. Ecol. 53:1-19.
- Eley, R. L. 1970. Physiochemical limnology and community metabolism of Keystone Reservoir, Oklahoma. PhD Thesis, Oklahoma State University, Stillwater, Oklahoma.
- Ererson, S. 1975. Gas exchange rates in small Canadian shield lakes. Limno. Oceanogr. 20:754-761.

- Environmental Protection Agency. 1975. A compendium of lake and reservoir data collected by the National Eutrophication Survey in the Northeast and North-Central United States. National Eutrophication Survey Working Paper No. 474. Corvallis, Oregon.
- Fair, G. M., Geyer, J. C., and Okum, D. M. 1966. Water and wastewater engineering. Vol. 1. John Wiley and Sons, Inc., New York.
- Falter, C. M., Skille, J., and Ringe, R. R. 1973. Limnology of Dworshak Reservoir in the first year after dam closure. Interim report submitted to the U. S. Army Corps of Engineers, Walla Walla District.
- Falter, C. M., Ringe, R. R., Skille, J., and Stowell, R. 1974. Limnology of Dworshak Reservoir in the second year after dam closure. Interim report submitted to the U. S. Army Corps of Engineers, Walla Walla District.
- Ford, D. E. 1976. Water temperature dynamics of dimictic lakes: Analysis and predictions using integral energy concepts. PhD Thesis, University of Minnesota, Minneapolis.
- Hargrave, B. T. 1969. Similarity of oxygen uptake by benthic communities. Limno. Oceanogr. 14:801-805.
- Hayes, F. R. and MacAulay, M. A. 1959. Lake water and sediment. Part V. Oxygen consumed in water over sediment cores. Limno. Oceanogr. 4: 291-298.
- Henson, E. B., Bradshaw, A. S., and Chandler, D. C. 1961. The physical limnology of Cayuga Lake, New York. Cornell Exp. Sta. Memoir No. 378. Cornell University, Ithaca, New York.
- Henson, E. B., Potash, M., and Sundberg, S. E. 1966. Some limnological characteristics of Lake Champlain, U. S. A., and Canada. Verh. Internat. Verein. Limnol. 16:72-84.
- Hutchinson, G. E. 1957. A treatise on limnology. John Wiley & Sons. New York.
- Lapitsky, I. I. 1966. In Lowe-McConnell, R. H., Man-made 'akes, symposia of the Institute of Biology. No. 15. Academic Press, New York.
- Lowe-McConnell, R. H. 1971. Reservoirs in relation to man: fisheries. International Symposium on Man-Made Lakes. Their problems and environmental effects. Knoxville, Tennessee.
- McDonnell, A. J. and Hall, S. D. 1969. Effect of environmental factors on benthal oxygen uptake. Jour. Wat. Poll. Contr. Fed. 41(8):R353-R363.

- McKeown, J. J., Benedict, A. H., and Locke, G. M. 1968. Studies on the behavior of benthal deposits of wood origin. Jour. Wat. Poll. Contr. Fed. 40(8):R333-R353.
- Miterev, G. A. and Belova, E. M. 1957. Influence of a submerged forest in a water reservoir on the quality of water. Sbornik Navch. Rabot. Moskov. Farm. Inst. Vol. 1:395-401.
- Neame, P. A. 1975. Oxygen uptake of sediments in Castle Lake, California. Verh. Internat. Verein. Limnol. 19:792-799.
- Newbold, J. D. and Liggett. 1974. Oxygen depletion model for Cayuga Lake. Jour. Env. Engr. Div. ASCE. 100:41-59.
- New York State Electric and Gas Corporation. Feb 1974. Cayuga Station application to the New York State Board on electric generation siting and the environment for a certificate of environmental compatibility and public need. Vol. 4:80.2-93-C.
- Oglesby, R. T. and Allee, D. J. (eds.). 1969. Ecology of Cayuga Lake and the proposed Bell Station (nuclear-powered). Publication No. 27. Water Resources and Marine Sciences Center, Cornell University, Ithaca, New York.
- Potash, M. and Henson, E. B. 1975. Chemical changes in Lake Champlain: A decade of observations. Verh. Internat. Verein. Limnol. 19:421-428.
- Purcell, L. T. 1939. The aging of reservoir waters. Jour. Am. Wat. Works Assoc. 31:1775-1802.
- Quebec (Province) Service de la qualite des eaux. 1976a. Etude limnologique (P.I.E. 1973): Lac Aylmer, Comte de Wolfe. Gouvernement du Quebec, Ministere des Richesses naturelles, Direction generale des eaux.
- Quebec (Province) Service de la qualite des eaux. 1976b. Etude limnologique (P.I.E. 1973): Lac Megantic, Comte de Frontenac. Gouvernament du Quebec, Ministère des Richesses naturelles, Direction generale des eaux.
- Quebec (Province) Service de la qualite des eaux. 1976c. Etude l'imnologique (P.I.E. 1973): Lac Nicolet, Comte de Fronterac. Gouvernement du Quebec, Ministère des Richesses naturelles, Direction generale des eaux.
- Saville, C. M. 1925. Color and other phenomena of water from an unstripped reservoir in New England. J. New Eng. Wat. Works Assoc. 39:145-170.
- Scott, J. J., Meyer, G. E., Stewart, R., and Walthe, E. G. 1969. On the mechanism of Langmuir circulations and their role in epilimnion mixing. Limno. Oceanogr. 14:493-503.

- Stearns, F. P. 1917. <u>In</u> Saville, C. M. 1929. Color reduction in storage reservoirs. J. New Eng. Wat. Works Assoc. 43:416.
- Stein, J. E. and Denison, J. G. 1966. <u>In situ</u> benthal oxygen demand of cellulosic fibers. Adv. Wat. Poll. Res. 3:181-190.
- Wetzel, R. G. 1975. Limnology. W. B. Saunders Co., Philadelphia, Pa.
- Whipple, G. C. 1914. The microscopy of drinking water. 3rd Ed. John Wiley & Sons, New York.
- Wright, T. D. 1969. In Oglesby, R. T. and Allee, D. J., eds., Ecology of Cayuga Lake and the proposed Bell Station (nuclear-powered). Publication No. 27. Water Resources and Marine Sciences Center. Cornell University, Ithaca, New York.

Table 1 Morphometry of Dickey Lake and 25 Study Lakes

			,			,		Loadin	Loading, g/m²/yr
No.*	Lake Name	Lake Type	Drainage Area, km ²	Maximum Depth, m	Mean Depth, m	Surface Area, km ²	Volume m ³	Nitrogen	Total Phosphorus**
-	Dickey Lake	Power Reservoir	7,058	99.1	23.8	348.1	9.5×109	;	0.19
2	Long Lake	Natural	210	49.7	16.2	24.3	3.9×108	ŀ	0.12
3	Eagle Lake	Natural	1,968	42.7	13.7	22.6	3.1×108	ł	0.76
4	Cold Stream Pond	Natural	9.95	31.7	13	14.7	1.8×108	1	0.017
5	Embden Pond	Natural	54.6	50.3	15.7	6.3	1.0×108	;	0.03
9	Moosehead Lake	Natural; added dam for power	2,977	75	16.5	303.1	5.0×109	ŀ	0.08
7	Sebago Lake	Natural	1,048	96.3	34.1	116.4	3.98×109	1	0.08
80	Rangeley Lake	Natural	240	45.4	14.8	24.3	3.6×108	i	0.09
6	Lake Mégantic	Natural	751	75	28.8	26.42	7.9×108	i	0.02 mg/2
10	Lake St. Francois	Natural	1,157	40.2	15.6	47.14	7.1×108	;	0.02-0.03 mg/8
11	Lake Aylmer	Natural; dam for power	1,682	36.3	8.6	29.53	2.6×10 ⁸	ŀ	<0.02 mg/%
12	Lake Nicolet	Natural	6	41.4	17.3	4.01	7.2×10 ⁷	1	0.02 mg/£
13	Lake Champlain	Natural	20,057	122	22.4	1,139.5	25.6×109	;	0.81
14	Lake Seize Iles	Natural	1	50	1	3.65	1	;	;
15	Lake Montagne Tremblante	Natural	1	100	1	9.45	;	;	:
16	Lake Labelle	Natural	1	70	1	7.38	i	;	:
17	Lake Trois Montagne	Natural	1	20	;	3.34	1	1	;
18	Otisco Lake	Natural	88	20.1	10.2	7.6	7.8×10 ⁷	1	0.34 SP
19	Skaneateles Lake	Natural	189	90.5	43.5	35.9	1.6×10 ⁹	!	0.16 SP
20	Owasco Lake	Natural	539	54.0	29.3	26.7	7.8×10 ⁸	ŀ	0.56 SP
21	Cayuga Lake	Natural	2,106	132.6	54.5	172.1	9.4×109	;	0.49
22	Seneca Lake	Natural	1,831	198.4	88.6	175.4	15.5×109	;	0.30 SP
23	Keuka Lake	Natural	787	55.8	30.5	47.0	1.4×10 ⁹	;	0.33 SP
24	Honeoye Lake	Natural	95	9.2	4.9	7.0	3.5×10 ⁷	;	0.30 SP
25	Canadice Lake	Natural	31	25.4	16.4	2.6	4.3×10 ⁷	;	0.22 SP
26	Hemlock Lake	Natural	111	27.5	13.6	7.2	1.0×108	;	0.29 SP

*Numbers correspond to similar numbers in Figure 1.

Table 2
Study Lakes and Data Sources

Data Source
NED
Davis et al., 1976
Cowir; and Scott, 1975, 1976
Davis et al., 1976
Davis et al., 1976
Cooper and Fuller, 1945; NED, unpublished data
Cooper, 1939
Davis et al., 1976
Québéc Service de la qualite des eaux, 1976b
Québéc Service de la qualite des eaux, unpublished data
Québéc Service de la qualite des eaux, 1976a
Québéc Service de la qualite des eaux, 1976c
Henson et al., 1966; Potash and Henson, 1975
Québéc Service de la qualites des eaux, unpublished data
Québéc Service de la qualites des eaux, unpublished data
Québéc Service de la qualites des eaux, unpublished data
Québéc Service de la qualites des eaux, unpublished data
Oglesby unpublished data
Oglesby unpublished data
Oglesby unpublished data
Henson et al., 1961; Oglesby and Allee, 1969; Oglesby unpublished data
Oglesby unpublished data
Oglesby unpublished data
Oglesby unpublished data
Oglesby unpublished data
Oglesby unpublished data

Table 3 Oxygen Uptake Rates from Literature

Lake	Oxygen Uptake Rate g/m ² /day	Temperature OC	Remarks	Data Source
Erken	0.43	7	In situ	Edberg and Hofsten, 1973
Norrviken 1 2	1.80	~ ~ ~	Newly deposited algal layers. Eutrophic lake	Edberg and Hofsten, 1973
Rivers Hiz & Ivel	0.96-2.40	10	1	Edwards and Rolley, 1965
Marion	0.109 0.140 0.173	4 5 9	Computed from regression equation based on 02 consumption vs temperature	Hargrave, 1969
Punchbowl Black Brook Copper Grand	0.165 0.212 0.180 0.300		Measured in situ in columns	Hayes and MacAulay, 1959
1	0.96-1.92	\$	Computed from regression equation	McDonnell and Hall, 1969
1	0.20-0.80	20	Benthic demand from deposits of wood origin (laboratory)	NcKeown et al., 1968
1	0.18-0.38	20	Same as above after 30-50 days exposure	McKeown et al., 1968
Castle	0.48-1.20	15	Laboratory study of lake sediment	Neame, 1975
Cayuga	G.32-0.53	7	Values used in mathematical model of Cayuga	Newbold and Liggett, 1974
Port Angeles Harbor	3.60	10.9	Escuary. In situ in pulpmill sulfite wastes	Stein and Denison, 1966

Table 4

Potential Hypolimnion Oxygen Values
during Incremental Filling

Time	Elevation	DO	e, g/m ² /day - Avg Concentration, m	g/l
of Filling	m	1.23	2.40	3.60
1st spring	239.3	-0.8*	-25.0	-37.4
2nd spring	258.2	4.2	0.7	-2.8
3rd spring	269.1	5.3	3.1	0.8
Final spring	277.4	5.1	3.1	1.1
2nd full year	277.4	6.2	6.2	6.2

 $[\]boldsymbol{\star}$ Negative values represent an unsatisfied oxygen deficit at the end of the stratification period.

Table 5

Duration of Stabilization Period in Uncleared Reservoirs (after Campbell et al., 1976)

Region	Parameter	Duration, yr	Reference
Cold temperate	Biological productivity	25-30	Lowe-McConnell, 1971
United States	Color, Fe, CO ₂	10-15	Fair et al., 1966
New England	Color, plankton	8-10	Whipple, 1914
Connecticut	Color, odor, organic nitro-gen, biota	3-10 (mean of 6) 1-38 (mean of 13)	Stearns, 1917
Connecticut	Color	3-10 (mean of 6)	Saville, 1925
New Jersey	Color, Fe, CO ₂	7	Purcell, 1939
Russia >50°N	Biological productivity	25–30	Lapitsky, 1966
Russia <50°N	Biological productivity	6–10	Lapitsky, 1966
Russia, Ural Mountains	Physicochemical, algae, bacteria	7	Miterev and Belova, 1957
Warm temperate	Biological productivity	10-15	Lowe-McConnell, 1971
Tropical	Biological productivity	10	Lowe-McConnell, 1971

APPENDIX A

TEMPERATURE AND DO DATA

FOR 25 STUDY LAKES

Long Lake Maine

						2.9			/73					11.1						
8/24	Temp	11.0	10.5	10.5	7.0	0.9	5.8	5.0	3/26	Temp	0.0	0.3	0.7	1.0	1.3	1.7	1.9	2.0	2.1	2.2
71	임	11.3	11.5	11.6	10.6	10.0	9.1	1	3/72	8	11.1	11.1	11.0	11.1	11.0	11.0	11.0	11.0	11.0	11.0
6/21/	Temp	10.9	9.0	6.5	6.0	5.1	5.0	1	1											
11								¦	/72	8	10.0	10.0	10.0	7.5	7.1	7.0	7.0	6.5	6.3	6.2
4/19	Temp	0.0	0.7	1.0	1.3	1.9	2.1	1	-	•										
0//0	8	10.2	10.2	10.2	10.2	10.2	10.2		/72	8	9.5	9.8	10.5	10.1	10.1	10.0	10.0	10.0	8.5	!
11/1	Temp	4.3	4.3	4.3	4.3	4.3	4.3	1	6/27	Temp	11.0	10.5	6.0	4.1	3.9	3.4	3.3	3.0	3.0	1
/70	8	10.1	8.5	6.1	5.0	5.3	0.9	i	172	8	13 0	13.6	12.0	11.0	10.5	6.6	9.5	7.5	ţ	1
8/17	Temp	13.1	12.8	8.0	4.9	6.9	4.2	1	4/11	Temp	0.0	1.0	1.2	1.2	1.2	1.2	1.5	1.9	}	1
/70	D0**	10.2	9.0	7.0	8.0	10.0	}	1	1//9	00	11.0	11.0	11.0	11.0	11.0	11.0	;	ł	}	!
6/79	Temp*	9.1	9.0	7.6	6.8	5.7	;	1	11/11	Temp	3.5	3.5	3.5	3.5	3.5	3.5	i	ļ	ł	1
	Depth (m)	0	'n	10	15	20	25	30		Depth (m)	0	5	10	15	20	25	30	35	07	45

^{*} Temperatures are in ^oC.

^{**} DO is measured in mg/ℓ

Eagle Lake Maine

		8	6.6	9.5	6.3	4.8
Station 3	9/8/75	Temp	17.0	16.6	0.6	8.0
St	6	Depth (m)	9.0	8.0	15.0	22.0
				6.6		
Station 2	9/9/75	Temp	16.8	16.8	8.2	6.2
				12.0		
		D0**	10.0	9.6	7.8	6.5
Station 1	9/9/75	Temp*	16.4	16.4	7.5	5.8
Sté	6	Depth (m)	9.0	8.0	14.0	35.0

^{*} All temperatures are in $^{\circ}C$.

^{**} DO is measured in mg/ℓ .

Cold Stream Pond South Basin Maine

1	7.	3	9.1	7.0	6.5	5.6	5,3	5.0	4.2	73	8	12.1	12.3	12.5	12.4	10.9	8.1	5.0
12/ /0/ 8	7,527	Temp	12.9	12.7	9.0	5.0	4.3	4.3	4.0	3/27/73	Temp	0.0	1.0	1.0	1.0	1.0	1.3	1.7
17.	1, T		10.0	11.0	12.0	12.0	12.0	12.0	11.9	11/14/72	00	13.0	14.0	13.2	13.2	13.0	12.8	12.6
17/00/9	177 /O	Temp	12.0	11.1	7.0	4.5	4.2	4.2	4.0	11/17	Temp	4.1	4.1	4.1	4.1	4.1	4.1	7.4
7.1	٠ ر	3	13.0	13.0	12.9	12.0	10.4	8.8	1	72	00	9.1	9.1	9.3	8.6	9.2	9.1	9.1
/06/7	102/4 Tomp	dwat	0.8	1.8	1.2 12.	1.7	2.0	2.1		8/29/72	Temp	12.0	11.5	0.6	5.4	4.9	6.4	4.9
1	_				10.5					72	00	9.1	9.5	10.5	11.2	11.2	11.1	11.0
02/11/11	Tomp	dma T	5.5	5.5	5.5	5.5	5.5	5.5	-	6/28/72	Temp	12.8	10.0	7.0	5.0	5.0	5.0	6.4
70	2	3	8.8	8.0	10.0	6.6	9.2	0.6	1	72	DO	14.2	13.2	13.2	13.0	11.1	9.3	4. 8
8/18/70	Temn	d mar	13.8	13.8	8.0	5.4	5.1	5.1	!	4/12/72	Temp	0.3	1.0	1.5	1.8	2.0	2.1	2.5
70	**Ou	3	9.0	8.9	10.0	10.0	10.9	10.7	1	/71	DQ	11.9	11.9	11.9	11.9	11.9	11.9	1
07/08/9	Temn*	dmot	10.7	10.7	6.1	5.1	5.0	5.0	-	11/11/11	Temp	3.6	3.6	3.6	3.6	3.6	3.6	3.6
	Denrh (m)	מבה בוו (יייו/	0	5	10	15	20	25	30		Depth (m)	0	\$	10	15	20	25	30

* All temperatures are in $^{\circ}$ C.

^{**} DO is measured in mg/ℓ .

Cold Stream Pond North Basin Maine

73	8	13.0	10.7	8.3	5.8
3/27/73	Temp	0.7	0.8	1.2	2.1
4/72	00	13.3	13.6	13.9	14.0
11/14/72	Temp	2.1	2.2	2.4	2.6
/72	00	8.1	8.0	4.0	3.9
6/29/72	Temp	13.5	12.2	6.4	5.7
772	8	11.8	11.8	11.8	11.9
6/28/72	Temp	13.4	11.0	5.6	5.0
72	**O0	13.1	12.0	9.1	6.5
4/12/72	Temp*	1.0	1.8	2.0	2.0
	Depth (m)	0	5	10	15

-

^{*} All temperatures are in $^{\circ}$ C.

^{**} DO is measured in $mg/\ell_{\rm a}$.

Moosehead Lake Maine

Adams and the contract of the

	Stati	Station W1	Station W2	n W2	Station W3	n W3	Station W4	M4 11	Station W6	n W6	Station W7	L M7
	9/2	9/2/44	9/9/9	,44	6/6/44	,44	91/9/9	77	6/11/44	744	6/13/44	747
Depth (m)	Temp*	**OQ	Temp	20	Temp	20	Тетр	00	Temp	8	Temp	8
0	20.4	7.6	20.5	9.2	20.3	9.3	19.7	9.5	19.2	9.6	19.0	0.6
Э	19.4	ŀ	19.8	ļ	20.2	1	19.4	;	18.6	;	19.0	}
9	16.1	10.0	14.6	9.5	14.7	9.4	14.5	6.6	14.4	10.0	18.5	0.6
6	14.2	10.0	14.1	9.6	13.6	10.0	12.6	10.3	11.8	10.5	16.5	8.4
12	12.8	1	13.5	ł	13.0	i 1	11.4	10.3	11.2	}	15.0	ł
15	11.8	10.4	12.3	8.6	11.7	9.6	10.3	10.6	10.5	10.9	11.0	8.3
18	11.0	1	11.7	ì	11.2	ł	6.7	ŧ	9.5	1	10.1	:
21	10.6	10.5	11.1	8.6	11.0	10.0	8.8	10.2	9.3	11.1	8.7	1
24	10.4	1	10.9	1	ļ i	i	8.0	ł	8.6	;	8.2	i i
27	10.1	ļ	10.6	ł	ł	ļ !	7.5	1	7.9	;	7.8	!
30	9.6	1	10.3	7.6	1	ł	6.9	10.7	7.6	11.4	7.4	9.7
33	8.8	1	1	ŀ	1	ł	6.2	!	ł	1	7.3	9.1
36	8.2	10.1	ł	i	¦	1	0.9	11.1	7.1	ł	i	1
39	7.9	1	1	ł	;	ł	5.9	ļ	i	}	;	1
42	7.7	10.5	1	ł	ł	ļ	5.7	11.1	6.8	11.6	į	!
45	1			1	ł	1	5.6	10.9	!	!	ŧ	ļ

* All temperatures are in $^{\rm O}{\rm C}$.

** DO is measured in mg/&.

Moosehead Lake (Contirued)

ation W7 6/13/44	8 1	1	ł	;	1	-	n W13	8/10/44	8	8.1	ł	7.6	ł	ł	ł	i
Station W7 6/13/44	Temp	ł	1	i	1	i ! !	Station W13	8/10	Temp	22.5	22.2	19.8	i	1	1	1
ation W6 6/11/44	임 !	ł	11.5	;	i	11.6	Station W12	8/8/44	8	8.7	i	8.6	8.8	ł	6.7	i
Station W6 6/11/44	Temp 6.5	1	6.4	1	6.3	6.3	Stati	8/8	Temp	23.0	21.8	21.5	19.2	13.3	11.1	6.6
ation W4 6/6/44	2	ł	ł	ł	ł	1	Station W11	8/8/44	8	8.7	ŀ	8.6	8.4	ł	0.6	ł
Station W4 6/6/44	Temp 5.6	5.5	1	!	!	i	Stati	8/8	Temp	20.8	20.4	20.1	19.6	17.7	12.4	6.6
Station W3 6/6/44	00	1	;	1	i	į	Station W10	8/7/44	00	7.9		8.5	8.5	!	8.8	ł
Stati 6/6	Temp	1	1	!	!	!	Stati	8/7	Temp	22.6	21.2	21.0	17.9	15.8	13.3	12.0
on W2	8 1	l	1	1	1	1	on W9	/44	20	8.7	1	8.7	8.6	1	8.9	1
Station W2 6/6/44	Temp	1	}	!	ł	1	Station W9	8/1/44	Temp	21.3	21.0	20.7	16.7	13.9	13.0	12.1
Station W1 6/5/44	Temp D0	1	1	!	ļ	1	on W8	744	Temp DO	0.6	!	ł	9.1	9.4	9.6	1
Station 6/5,	Temp	1	1	1	ł	1	Stati	8/2	Temp	22.0	19.2	18.8	18.4	13.6	11.6	10.7
	Depth (m)	51	54	57	09	63			Depth (m)	0	8	9	6	12	15	18
1	Dei								De							

Moosehead Lake (Continued)

	Station W13	8/10/44	8	i	1	;	ļ	ł	;	1	;	ł	1	ł	ļ	1	ł
-	Statí	8/1	Temp	1	1	!	ł	:	ł	ł	}	ł	ļ	ł	1	i	i
	Station W12	8/8/44					10.2								1	ł	1
	Stati	8/8	Temp	9.6	0.6	8.4	8.1	7.9	7.8	7.8	7.7	ł	ł	ł	i	i	ł
	Station Wll	8/8/44					10.0										
	Static	8/8	Temp	0.6	8.6	8.2	8.0	7.8	7.4	7.2	7.0	7.0	i	6.9	;	8.9	6.7
	Station W10	8/7/44	00	0.6	;	8,8	8.8	ŀ	•	i	ļ ī	1	1	†	!	}	1
	Static	8/1/	Temn	11.7	11.5	11.4	11.3	1	i i	i	i	!	1	ł	1	}	1
	en W9	8/1/44	00	8.9	1	i i	9.6	i I	}	9,3	ł	9.1	;	}	}	!	1
	Station W9	8/1/	Temp	11.6	11.1	10.7	10.4	9.3	9.4	8.9	8.8	8.6	ł	ł	1	}	1
	n W8	77,	00	10.1	ł	1	8.2 10.2	1	10.6	1	10.7	1	ŀ	;	1	ł	1
	Static	8/2/	Temp	9.4	9.1	ļ	8.2	1	7.3	1	6.5	1	9.9	5.8	1	1	1
			Depth (m)	21	24	27	30	33	36	39	42	45	87	51	54	57	09

Moosehead Lake (Concluded)

9 u	9//	8	8.0	7.9	7.9	7.8	9.7	7.2	7.5	7.5	7.5	7.3	7.2	i	1	1	!	1
Station 6	8/25/76	Temp	20.3	19.8	19.5	19.1	17.4	11.8	10.4	10.1	9.8	6.7	9.6	1	ł	ļ	i	:
n 2	9//	00	9.3	11.1	12.3	13.1	11.9	11.4	11.1	10.7	10.3	6.6	9.5	1	1	1	1	1
Station 2	8/24/76	Temp	22.7	21.6	21.3	20.6	9.4	8.7	8.2	7.8	7.4	6.9	6.9	į 1	ļ	ł	1	6.9
n 1	8/24/76	00	8.4	10.7	12.5	13.3	13.1	12.7	1	1	I	1	}	1	!	ł	1	ł
Station 1	8/24	Temp	21.2	20.8	19.8	13.3	11.1	0.6	i i	ļ	ļ	1	}	!	1	ŀ		!
n W16	/44	00	!	1	ļ i	i	1	ł	;	!	i I	ŀ	1	!	i	}	ł	ŀ
Station W16	8/16/44	Temp	22.1	22.1	21.0	18.5	16.8	11.7	10.5	7.6	8.9	8.9	8.3	8.0	7.9	7.5	7.2	7.1
ration W15	744	20	9:	·	3.6	8.5	ł	8.7	ŀ	9.2	!	!	.3	!	.3	ı	ı	1
10		1	ω	ı	~	••			·	•	•	•	O,	ı	6	İ	1	
Stati	8/11/44	•							12.6								!	
S		Temp	21.8	21.7	21.i	20.4	15.4	13.7	12.6	11.1	11.1	11.1	10.8	10.6	10.5	10.4	ł	1
Station W14 Stati		Temp	21.8	21.7	21.i	20.4	15.4	13.7	12.6	11.1	11.1	11.1	10.8	10.6	10.5	10.4	ł	

	6/17	6/17/70	8/5/70	70	9/1/10	70	11/1/70		/6/7	11,	5/15/71	171
Depth (m)	Temp*	D0**	Temp	00	Temp	D0	Temp		Temp	8	Temp	
C	12.1	9.1	14.0	8.9	10.9	9.2	0.9		1	12.9	3.1	
) LC	8,9	10.9	14.0	8.2	10.9	9.0	0.9		1.6	11.1	3.1	
o 01	4.3	11.0	5.9	12.0	8.0	0.6	0.9		1.9	11.0	3.1	
3.5	7.0	11.0	4.1	10.5	4.5	8.8	0.9		2.0	11.0	3.1	
50 20	3,5	10.9	3.5	11.2	4.0	8.5	4.5		2.0	11.0	3.0	
25	3.2	11.6	3.1	10.9	3.7	8.2	4.0		2.0	10.9	2.9	
<u>0</u>	3.0	10.5	3.0	10.8	3.4	8.1	3.9		2.0	10.8	2.9	
) (°	1	1	!	9.5	;	8.2	3.9	2.1	2.1	10.3	2.9	11.9
07	}	1	ł	8.3	1	8.3	3.9		2.1	0.6	2.8	
w <	ļ	ł	ŀ	7.5	ł	8.4	3.9		2.1	7.5	2.8	
500	1	1	}	ļ	1	8.5	3.9	ţ	2.1	į	2.7	12.1
	18/9	6/30/71	8/15	8/19/71	10/2	10/2/71	11/28/71	28/71	3/13/72	3/72	5/15/72	5/72
Ոբո ւ հ (m)	Temp) DQ	Тепр	00	Тетр		Temp	DO	Temp	2	Temp	OD
	13.0	8.8	13.1	7.9	10.0	9.5	3.1	12.1	ļ	15.1	2.9	13.0
) ເ ମ	11.5	0.6	13.1	7.3	10.0	9.5	3.1	12.1	1.0	13.1	2.9	12.0
0 -	5.0	10.1	6.0	6.6	8.0	10.1	3.1	12.1	1.1	12.9	2.9	12.0
15	4.3	4.3 10.1	4.5	10.2	5.1	6.6	3.1	12.1	1.2	12.1	2.2	11.9

 \star All temperatures are measured in 0 C.

- 2

^{**} DO is measured in mg/ℓ .

Embden Pond (Continued)

mp DO Temp DO Temp <th>12/08/9</th> <th></th> <th>8/19/</th> <th>/71</th> <th>10/2</th> <th>/71</th> <th>11/2</th> <th>17/8</th> <th>3/13</th> <th>172</th> <th>5,16</th> <th>17.</th>	12/08/9		8/19/	/71	10/2	/71	11/2	17/8	3/13	172	5,16	17.
9 4.0 9.8 3.1 12.0 1.2 12.0 2.1 18 3.9 9.7 3.1 11.9 1.3 12.0 2.1 5 3.8 9.3 3.1 11.3 1.5 11.9 2.1 11 3.8 9.0 3.1 11.0 1.7 11.2 2.1 12 3.8 9.0 3.1 11.0 1.7 11.2 2.1 13 3.8 $$ 3.1 11.0 1.7 11.2 2.1 15 10.0 3.1 11.0 1.5 12.0 2.1 10 10.0 8.9 3.1 11.0 1.5 12.0 2.9 10 10.0 8.9 3.1 11.0 1.5 12.0 2.9 10 10.0 10.0 3.1 11.0 1.5 11.0 2.9 10 10	Te	Z7	dui	DO	Temp	1. CO	Temp	DO 00	Temp	D0	Temp	<u>8</u>
8 3.9 9.7 3.1 11.9 1.3 12.0 2.1 13 3.8 9.3 3.1 11.3 1.5 11.9 2.1 13 3.8 9.1 3.1 11.0 1.7 11.2 2.1 18 3.8 3.1 2.0 5.2 2.1 2.0 2.1 2.0 2.1 2.0 2.1 2.1 2.1 2.1 2.1 2.1 2.1 13.9 3.8 3.8 <td>10.2 4.0</td> <td></td> <td>0</td> <td>10.9</td> <td>4.0</td> <td>9.8</td> <td>3.1</td> <td>12.0</td> <td>1.2</td> <td>12.0</td> <td>2.1</td> <td>11.9</td>	10.2 4.0		0	10.9	4.0	9.8	3.1	12.0	1.2	12.0	2.1	11.9
5 3.8 9.3 3.1 11.3 11.9 11.9 2.1 13 3.8 9.1 3.1 11.0 1.7 11.2 2.1 13 3.8 9.0 3.1 9.5 1.9 9.3 2.1 18 3.8 3.1 2.0 10 $\frac{1.5}{1.5}$ $\frac{1.1}{1.5}$ $\frac{1.0}{1.5}$ $\frac{1.0}{1.5}$ $\frac{1.0}{1.5}$ $\frac{1.0}{1.5}$ 10 $\frac{10.0}{10.0}$ $\frac{1.0}{10.0}$ 1.0		•	0	10.8	3.9	9.7	3.1	11,9	1.3	12.0	2.1	11.9
3.3 3.8 9.1 3.1 11.0 1.7 11.2 2.1 1.3 3.8 $$ 3.1 $$ 2.0 5.2 2.1 1.8 3.8 $$ 3.1 $$ 2.0 5.2 2.1 2. $$ $$ $$ $$ $$ $$ 2.0 3. $$ $$ $$ $$ $$ $$ 2.1 4. $$ $$ $$ $$ $$ $$ $$ 2.1 5. $$ $$ $$ $$ $$ $$ 2.1 1. $$ $$ $$ $$ $$ $$ 2.1 2. $$ $$ $$ $$ $$ $$ 2.1 3. $$ $$ $$ $$ $$ $$ 2.1 3. $$ $$ $$ $$ $$ $$ $$ 2.1 <		٥,	•	10.5	3.8	9.3	3.1	11.3	1.5	11.9	2.1	11.9
1 3.8 9.0 3.1 9.5 1.9 9.3 2.1 8 3.8 3.1 2.0 5.2 2.1 2.0 2.1 1 $\frac{1.5}{10.0}$ $\frac{1.1/19/72}{11.0}$ $\frac{1.5}{11.0}$ $\frac{1.5}{13.9}$ $\frac{2.1}{2.1}$ 1 $\frac{1.5}{10.0}$ $\frac{1.5}{11.0}$ $\frac{1.5}{11.0}$ $\frac{1.5}{11.0}$ $\frac{1.5}{11.0}$ $\frac{2.9}{2.8}$ 9 3.2 10.0 3.1 11.0 1.5 11.5 2.8 9 3.2 10.8 3.1 11.0 1.5 11.5 2.8 9 3.2 10.8 3.1 11.0 1.5 11.5 2.8 9 3.0 10.9 3.1 11.0 1.5 11.0 2.8 9 3.0 10.9 3.1 11.0 1.5 10.0 2.8 9 3.0 10.9 3.1 11.0 1.5		6.		10.3	3.8	9.1	3.1	11.0	1.7	11.2	2.1	11.9
8 3.8 — 3.1 — 2.0 5.2 2.1 - — — — — — 2.0 5.2 2.1 - — — — — — — 2.1 0 Temp DO Temp DO Temp DO Temp 0 10.0 8.9 3.1 11.5 12.0 3.8 9 5.5 10.0 3.1 11.0 1.5 12.0 2.9 9 3.2 10.8 3.1 11.0 1.5 11.5 2.8 9 3.0 10.9 3.1 11.0 1.5 11.0 2.8 8 3.0 10.9 3.1 11.0 1.5 10.0 2.7 8 3.0 10.9 3.1 11.0 1.5 10.0 2.7 9 3.0 10.9 3.1 11.0 1.5 10.0 2.8	10.2 3.9	6.		10.1	3.8	0.6	3.1	9.5	1.9	9.3	2.1	11.9
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		6.		8.6	3.8	l	3.1	ł	2.0	5.2	2.1	11.9
Jobeth Properties Jobeth Properties	3.5 9.0	ı		ł	ł	!	!	ł	ŧ	ł	2.1	1
Temp DO Temp DO Temp DO Temp 10.0 8.9 3.1 11.5 13.9 3.8 10.0 8.9 3.1 11.0 1.5 12.0 3.0 5.5 10.0 3.1 11.0 1.5 12.0 2.9 4.0 10.1 3.1 11.0 1.5 11.5 2.8 3.2 10.8 3.1 11.0 1.5 11.0 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.7		8/1	1 ~		9/15	172	11/1	9/72	3/23	1/73	5/2/	73
10.0 8.9 3.1 11.5 13.9 3.8 10.0 8.9 3.1 11.0 1.5 12.0 3.0 5.5 10.0 3.1 11.0 1.5 12.0 2.9 4.0 10.1 3.1 11.0 1.5 11.5 2.8 3.2 10.9 3.1 11.0 1.5 11.0 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7				8	Temp	00	Temp	20	Temp	00	Temp	8
10.0 8.9 3.1 11.0 1.5 12.0 3.0 5.5 10.0 3.1 11.0 1.5 12.0 2.9 4.0 10.1 3.1 11.0 1.5 11.5 2.8 3.2 10.9 3.1 11.0 1.5 11.0 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7		٠.		8.0	10.0	8.9	3.1	11.5	ł	13.9	3.8	11.0
5.5 10.0 3.1 11.0 1.5 12.0 2.9 4.0 10.1 3.1 11.0 1.5 12.0 2.8 3.2 10.8 3.1 11.0 1.5 11.5 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7		0.		8.0	10.0	8,9	3.1	11.0	1.5	12.0	3.0	11.0
4.0 10.1 3.1 11.0 1.5 12.0 2.8 3.2 10.8 3.1 11.0 1.5 11.5 2.8 3.0 10.9 3.1 11.0 1.5 11.0 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7		6.		6.6	5.5	10.0	3.1	11.0	1.5	12.0	2.9	11.1
3.2 10.8 3.1 11.0 1.5 11.5 2.8 3.0 10.9 3.1 11.0 1.5 11.0 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7		5.		10.8	4.0	10,1	3.1	11.0	1.5	12.0	2.8	11.1
3.0 10.9 3.1 11.0 1.5 11.0 2.8 3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7		.2		10.9	3.2	10.8	3.1	11.0	1.5	11.5	2.8	11.0
3.0 10.9 3.1 11.0 1.5 10.9 2.8 3.0 10.9 3.1 11.0 1.5 10.0 2.7		0.		10.9	3.0	10.9	3.1	11.0	1.5	11.0	2.8	11.0
3.0 10.9 3.1 11.0 1.5 10.0 2.7	0.9 4.0	0.		10.8	3.0	10.9	3.1	11.0	1.5	10.9	2.8	11.1
		0.		10.5	3.0	10.9	3.1	11.0	1.5	10.0	2.7	11.2

Embden Pond (Concluded)

	6/28	6/28/72	8/11/72	./72	9/15/72	172	11/1	9/72	3/23/73	/73	5/2/73	/73
Depth (m)	Temp	DC	Temp	NO	Temp	00	Temp	Temp DO	Temp	00	Temp	00
40	3.0	10.9	4.0	16.5	3.0	10.9	3.1	10.9	1.7		2.7	11.3
45	3.0	3.0 10.9	4.0	10.5	3.0	10.3	3.1	l I	2.0		2.6	11.2
50	3.0	3.0 10.9	4.0	9.5	3.0	1	3.1	!	2.0		2.5	11.0

ANTERSON PROPERTY CONTRACTOR OF THE CONTRACTOR O

Rangeley Lake Maine

* Temperatures are measured in °C. ** DO is measured in ng/%.

A13

Sebago Lake Maine

	9/3/	9/3/70	4/1/71	71	9/8/71	71	3/20	3/20/72	9/12	9/12/72	3/14	3/14/73
Depth (m)	Temp*	D0**	Temp	D0	Тетр	DO	Тетр	DO	Temp	D0	Temp	8
0	11.1	9.0	1.0	13.8	12.1	0.6	0.0	13.0	11.8	0.6	8.0	13.1
5	11.0	9.6	1.0	14.0	12.0	0.6	0.7	12.9	11.0	0.6	0.8	12.8
10	9.0	6.6	1.0	14.1	9.2	5.6	6.0	12.8	10.5	0.6	0.9	12.2
15	4.8	10.2	1.0	14.4	0.9	10.0	1.0	12.3	0.9	10.0	1.2	12.2
20	4.8	10.5	1.2	14.4	4.7	10.0	1.1	12.1	4.5	10.9	1.5	12.5
25	4.7	11.0	5.7	14.2	4.7	10.1	1.1	12.0	4.0	11.2	2.0	13.0
30	1	11.2	1.8	14.1	ŀ		1,2	11.9	6.)	11.3	2.1	13.1
	Stat	Station 1	Ctat	Station 2	Stati	Station 3	Stati	Station 4	Stati	Station 5	Stati	Station 6
	8/4	/38	8/8/38	/38	8/6/8	/38	8/6/8	/38	8/2/38	/38	8/4/38	,38
Depth (m)	Temp	00	Тетр	DO	Temp	D0	Temp	DQ	Тетр	00	Temp	8
0	27.2	8.9	25.6	0.6	25.6	8.7	25.6	8.9	26.7	9.1	26.1	9.3
9	25.0	1	25.0	9.3	22.1	ł	25.6	ł	22.4	1	24.7	1
6	17.9	9.2	15.1	1	1	ļ	24.4	9.2	20.9	9.5	17.1	1
12	10.0	11.5	11.6	11.3	11.1	11.3	11.8	11.2	12.3	11.1	9.2	11.3
15	8.4	11.8	9.1	ŀ	}	;	ł	ļ	9.6	Ì	8.8	}
18	7.9	11.9	8.4	-	8.4	ŀ	8.6	ł	8.5	11.5	8.4	!
21	7.5	7.5 12.0	7.6	;	ł	i	1	ţ	8.3	1	8.1	11.7

* All temperatures are in $^{\rm o}{\rm C}$.

^{**} DO is measured in mg/ℓ .

Sebago Lake (Concluded)

Station 6	8/4/38				ł										
Sta	8/	Temp	7.9	:	!	1	:	1	i	1	i	1	}	!	1
Station 5	8/2/38				11.7										
Stat	8/5	Temp	8.0	7.9	7.8	7.7	7.6	7.5	7.4	1	ŧ	1	ŀ	1	1
Ion 4	8/6/38	00	12.2	i	12.2	ļ	ł	ļ i	!	1	;	1	1	1	1
Stat	8/9	Temp	7.3	6.8	9.9	ł	1	1	i	ľ	i	1	ł	!	i
lon 3	8/6/8				1										
Stat	8/9	Temp	6.7	1	0.9	5.9	5.8	5.8	1	ŀ	1	l I	1	1	ł
Station 2	~				12.4										
Stat	8/8/3	Temp	7.3	6.9	9.9	1	ļ	1	ļ	5.6	5.4	5.1	5.0	5.0	5.0
Station 1	/38	D0	1	1	1	ł	ł	1	1	1	ł	}	1	!	}
Stat	8/4	Temp	}	}	1	1	}	ł	1	ł	1	1	ł	ł	1
		Depth (m)	24	27	30	33	36	39	42	45	09	7.5	84	87	06

Lake Nicolet Quebec

		Station 2N3E	2N3E					Station 1N2E	1 1N2E		
5/1/	5/1/73	6/13/73	3/73	8/4/	/73	5/1/	73	6/13	3/73	8/4	73
Temp*	**O0	Temp	8	Temp	8	Temp	8	Temp	8	Temp	Temp DO
3.7	13.3	17.9	0.6	22.8	10.0	1	13.1	17.7	0.6	23.5	9.8
3.7	13.3	16.0	8.6	22.2	10.0	3.8	13.1	15.9	9.1	23.0	6.6
3.7	13.3	13.2	10.8	21.0	10,1	3.8	13.1	13.2	10.7	22.5	10.1
3.7	13.3	10.0	11.5	13.0	11.5	3.8	13.1	10.0	11.5	12.0	11.9
3.7	13.3	8.0	12.0	8.8	11.9	3.8	13.1	7.9	11.9	9.4	11.9
3.7	13.8	7,3	12.0	7.9	11.7	3.8	13.1	7.9	11.9	9.4	11.5
3.7	13.8	6.9	12.0	7.8	11.5	3.8	13.1	!	;	9.6	11.3
3.7	13.9	6.5	11.9	7.3	11.5	3.8	13.1	1	ł	9.4	11.2
3.7	13.9	6.5	11.8	7.4	11.3	1	ł	ł	!	1	i
3.7	13.9	6.5	11.8	7.8	7.8 11.5	1	!	ł	1	1	1
3.7	13.9	6.5	11.7	7.9	11.9	}	¦	ţ	!	i	}

 \star All Temperatures are in $^{\rm O}{\rm C}$.

** DO is measured in mg/ℓ .

THE PROPERTY OF THE PARTY OF TH

Lake Saint-Francois Quebec

			Station	tation 29N7E					Station	Station 23N14E		
	5/3/	/73	6/18/73	1 1	8/3/	73	5/3/73	73	6/18/73	1/73	8/3/73	73
Depth (m)	Temp*	DO**	Temp	D0	Temn DC	6	Temp	8	Temp	6	Temp	00
0	5.9	12.6	16.0	7.6	24.0	0.6	5.8	14.1	16.0	10.1	25.5	10.0
3	5.1	12.6	14.1	6.6	23.1	8.5	5.7	14.0	15.8	9.2	23.6	0.6
9	5.0	12.5	13.2	9.6	22.9	8.9	5.4	14.0	15.0	6.6	23.0	9.5
6	6.4	12.3	11.5	9.1	20.0	7.2	5.2	13.5	14.9	10.4	18.0	8.6
12	4.3	12.0	6.6	9.1	12.0	0.9	5.0	13.3	12.0	10.1	12.9	0.6
15	;	{	}		}	1	5.0	5.0 13.3	10.5	10.9	11.5	9.1
18	;	1	!	ł	į	ł	5.0	13.2	9.5	11.0	10.5	0.6
21	1	}	1		ł	;	5.0	13.2	0.6	11.0	9.2	8.5
24	1	!	1		}	1	5.0	13.2	0.6	11.0	9.1	8.0
27	ļ	1	!	ł	1	ł	5.0	13.2	8.9	10.9	9.0	7.1
30	;	!	}	}	1	l l	5.0	13.1	8.8	10.5	8.9	7.0
			Station	tation 10N18E								

* All temperatures are in $^{\rm o}{\rm C}$.

8

<u>Temp</u> 24.2

8

Temp 17.0 16.0

Temp 5.4

Depth (m)

14.0

5.2

8/3/73

6/18/73

5/3/73

** DO is measured in mg/9.

Lake Saint-Francois (Continued)

emp DO 1.5 8.0 6.0 7.4 2.5 8.0 0.0 8.0 9.0 7.8 8.6 7.2 8.4 7.0	1 11 2 11 11	Temp D0 15.6 9.9 15.0 10.0 11.0 11.0 9.0 11.0 8.3 10.9 8.3 10.6 8.3 10.4	Emp D0 5.0 13.7 4.9 13.5 4.8 13.4 4.8 13.3 4.8 13.1 4.8 13.1	7/33
		9.9 10.0 11.0 11.0 10.0 10.0	Temp 15.6 11.0 9.0 9.0 8.3 8.3	Temp DO Temp 5.0 13.7 15.6 4.9 13.5 15.0 4.8 13.4 11.0 4.8 13.3 9.0 4.8 13.2 9.0 4.8 13.1 8.3 4.8 8.3 8.3
				15.6 15.0 11.0 9.0 8.3 8.3
		0.0 11.0 10.0 0.0 0.0		15.0 11.0 9.0 9.0 8.3 8.3
		1.0 0.0 0.0 0.0		11.0 9.0 9.0 8.3 8.3
		0.9		0.68889
		0.9		0.6 8 8 8 9 9 9 9 9 9 9 9
		0.00		8 8 8 9
		0.0		8 8 9
l I		0 0		8.3
		0		0
1	7			o. o
Station 23N14E	Stati	1 1		
3/23/76 4/28/76	3/2		5/11/75	
DO Temp	.	2	Temp	Temp
1		11.2	0.2 1	0.2
12.1 3.4	5 0.5	11.5	0.5	0.5
1	}	ł	ì	ì
12.2	2 1.5	12.2	1.4 1	

Lake Saint-Francois (Concluded)

	8
	Темр
	8/11/76 Temp DO 8.4 8.3 8.1 8.2 7.6 8.1 7.3 8.1 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7.6 7.4
	18.4 18.4 18.1 17.6 17.3 10.5 9.0
	4/28/76
4E	3.4 3.4 3.4 3.5 3.5 3.5
Station 23N14E	3/23/76 Temp D0 2.0 12.1
	Temp DO 1.8 12.2 2.5 12.1 2.5 12.1 2.5 11.4 2.7 10.5 3.0 9.6 3.1 7.7
	Depth (m) 4 5 6 7 8 9 10 11 12 12 20 25 26 28 30 34 35

Lake Aylmer Quebec

	8/13/73	Temp D0	24.0 7.2	23.2 7.9	23.0 7.8	0 0	TQ:0							<u>†</u> !	1 12	1 22	7/11	1 11	1 1/~	1 1/2	1 12	1 1/2
Station 9N9E	/73	8	0.6	6.0	9.5	9.3	9.1	8.6	1	1	!	i	on 11N4E	174	Temp DO	ļ	8.8	8.8	;	8.9	¦	9.0
Stati	6/11	Temp	1	17.1	16.5	12.5	11.2	11.0	1	1	1		Stati	8/27	Temp	1	20.5	20.5	1	20.5	1	20.5
	73	8	13.3	13.5	13.5	13.3	13.2	13.2	1	1				2/74	8	ł	15.6	†	15.4	1	1	1
	5/2/	Temp	7.0	5.9	5.8	5.8	5.8	5.5	ļ	!	1	1		3/17	Temp	ì	1.0	1	1.0	i	1	ł
	/73	8	6.9	7.0	7.5	5.3	6.5	7.0	7.0	7.0	7.0	6.9		3/73	20	5.8	ł	1	5.9	ł	}	5.8
	8/13/73	Temp	24.1	23.2	22.3	16.5	12.0	11.0	10.3	10.0	10.0	10.1	Œ	1	Temp	24.3	}	1	23.h	ļ	!	22.8
on 11N4E	/73	00	9.0	9.0	0.6			9.5			10.1	6.6	ion 19N8E	/73	8	10.3		ł		1	ł	10.0
Station 1	6/11	Temp	i	16.9	16.2	13.6	11.5	9.5	0.6	0.6	0.6	1	Stat	6/11	Temp	17.8	1	ł	17.2	1	1	15.5
	73	**OO	13.5	13.4	13.2	13.1	13.1	13.0	13.0	13.0	13.0	13.0		173	DQ C	13.5	ł	1	13.9	ļ	ł	13.1
	5/2/	Temp*	6.0	0.9	5.5	5.0	5.0	5.0	5.0	5.0	5.0	13.0		5/7	Temp	7.5	ł	ŀ	5.8	1	ļ	5.3
												2.7										

Lake Aylmer (cont'd)

Depth (m) Temp* Do** 6/11/73 8 9 5.2 13.2 12.5 10.0 10 11 12 5.1 13.5 11.1 10.1 13 15 5.0 13.3 10.5 10.2 17 17 13 5.0 13.3 10.5 10.2 18 5.0 13.1 9.9 10.1 20 21 23 24 24 24	8/13/7 Temp 16.0	773 3/12/ DO Temp 1.5 5.0	3/12/ mp	,74	8/27/	8/27/74	5/11/	75
Temp* DO** Temp DO 5.2 13.2 12.5 10.0 5.1 13.5 11.1 10.1 5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1	Temp 16.0		dш					
5.2 13.2 12.5 10.0 5.2 13.2 12.5 10.0 5.1 13.5 11.1 10.1 5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	16.0				Temp		Temp	- 1
5.2 13.2 12.5 10.0 5.1 13.5 11.1 10.1 5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	16.0		5.	13.5	20.5		1	
5.1 13.5 11.1 10.1 5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	1 1		ļ		20.0	7.6	!	
5.1 13.5 11.1 10.1 5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	!		1		13.5		1.9	
5.1 13.5 11.1 10.1 5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 9.2 9.9 9.2 9.9 9.4 9.2			ł		11.5		ł	
5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	12.0		ļ t		10.0	7.0	1	;
5.0 13.3 10.5 10.2 5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	1				7.6	7.0	i	1
5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	10.2				8.5	7.2	2.0	11.3
5.0 13.1 9.9 10.1 9.2 9.9 9.4 9.2	ļ	2	2.0	12.9	ŀ	!	1	;
9.2 9.9 9.4 9.2	10.9				ł	ł	;	1
9.2 9.9 					7.5	7.1	2.0	11.0
9.4 9.2	10.1				!	ļ	i i	1
9.4 9.2	ł				!	1	!	1
		1			1	i	!	i
	1				!	1	2.2	9.2
1		2			7.5	6.5	2.4	7.4

Lake Aylmer (concluded)

		8	ł	ł	ŀ	!	!	i	ì	ł	ł	ł	i	!	!	1	1	;
		Temp	}	1	1	1	1	1	1	1	!	1	1	!	!	ļ	i	1
		8	;	!	i i	1	i	1	ł	1	ł	1	1	ł	1	!	ł	!
		Temp	i	1	ł	i	}	i	1	ł	!	1	ł	!	!	}	1	1
	776	20	ł	8.3	8.3	8.1	}	8.2	8.2	8.2	6.2	6.7	;	6.5	ł	ł	ł	1
LIN4E	11/8	Temp	1	20.1	19.5	19.0	1	19.0	18.7	18.4	13.0	10.5	1	8.6	1	;	1	1
Station	3/76	20	11.6	11.6	1	ļ	11.2	19.0	ļ	11.2	1	!	11.1	ŀ	i	ł	11.0	10.8
9	4/28	Temp	3.6	3.6	1	1	3.6		}	3.5	ì	1	3.5	ł	l	}	3.5	3.6
	3/76	8	!					1										
	3/5	Temp DO	!	†	1.0	ì	1.7	1	1	2.9	1	3.0	3.3	i I	ŀ	3.4	3.4	1
	1/75	** 00	10.8	1	}	1	10.8	i	†	10.8	1	10.8	10.8		10.8	1		1
	11/1	Temp*	8.1	ŀ	;	1	8.1	1	1	8.1	1	8.1	8.1	1	8.1	ł	1	!
																		27

* Temperatures are in Oc.

^{**} DO is measured in mg/ℓ .

Lake Mégantic Quebec

	6	2	8	8.8	0	•	8.0	8.0	9.0	6,8		9.T	0.6			7.7.3		8	9.5	8		10.0	9.1	10.1		
	./ 7/ 0	6/10/0	Temp	22.0	71 /		19.0	14.5	10.1	α	•	œ .3	8.5			9/0	6/10/0	Temp	23.0	22.0	0. 1	22.5	14.0	0		
N 8N7E		73	00	11.0	, c	11.9	11.2	11.2	11.1	0 6 5	14.0	11.2	11.1		Station 21N4E	01.	6/4/73						12.5			
Station 8N7E		6/4/13	Temp		,	9.1	0.6	8	0	1 (7.3	6.8	6.7		Statio		9/9	Temp	σ		χ. 4.	8.6	8,8		0.0	
		173	00	1.	7.11	12.9	12.0	12.2	1, 2,	1 · ·	12.2	12.2	1	ì			4/25/73	20	12	T • CT	13.0	13.0	13.0) ·	13.0	
		4/25/73	Тетр	,	5.0	3°8	3,8	α; ~	, ,	0.0		3.8		!			4/2	Tomp		7.5	3.0	2.9	°	7.3	2.9	
		3	۽ ا		×.	0.6	0		0.0	7.6	6.6	ł		!			73	٤	3 3	8.1	8.8	α α	, ,	7.1	9.8	
		8/6/13	t mo E	Tamb	23.0	20.0	0 41		77.0	و. د.	8.9	ł		ł			8/6/13	E	Tellip	22.2	21.9	30 B	0 0	18.0	10.0	
	4N/E	60	2	3	11.5	11.5		0.21	12.0	12.0	11.1	!		1		14N7E	73		3	11.9	12.1	0	7.1.7	12.0	12.0	
	Station 4N/E	2/7/9		Temp	10,8	10.0) ·	9.0	9.1	8.5	8.7		¦	!		Station 14N7E	6/4/73		Temp	6.6	0.6		Q.1	7.2	9.9	}
		Ì		**00	12.9	13.0	0.01	12.8	12.8	12.6	12.6		i i	!			/73		8	12.9	12.9	7 1	12.9	12.9	3.0 13.0	
		1.175/73	107/4	Temp*	5.1	u	0.0	4.5	4.1	4.0	0 7	•	ì	}			1175/13	67/4	Temp	3.0	٠,	•	3.0	3.0	3.0	
																			(a)							
				Depth (m)	0	, '	m	9	6	12	u	CT	18	21					Depth (m)	0	. (m	9	6	12	

* All temperatures are in ^OC.

^{**} DO is measured in mg/ ℓ .

Lake Mégartic (Concluded)

	73	8	11.0	!	1	!	i	ł
	8/6/73	Temp DO	10.1	1	ł	1	1	1
Station 21N4E	73	Temp. DO	12.5	12.2	12.1	12.0	11.9	11.9
Station	6/4/73	Temp	7.9	7.9	7.9	7.8	7.0	7.0
	4/25/73	Temp DO	13.0	13.0	13.0	12.9	12.8	12.6
	4/25	Temp	2.9	2.9	2.9	2.9	2.9	2.8
	73	00	0.6	0.6	8.5 9.0	9.6	0.6	0.6
	8/6/73	Temp	8.9	8.7	8.5	8.2	8.5	8.7
tation 14N7E	6/4/73	00	6.5 12.0	12.0	6.0 12.0	5.9 12.0	11.9	11.7
Station	6/4/	Temp	6.5	6.2	0.9	5.9	0.9	0.9
	5/73	Temp DO	12.9	12.8	13.0	13.0	13.0	12.9
	4/2	Temp	3.0	3.0	3.0	3.0	3.0	3.1
		Depth (m)	15	18	21	24	27	30

Lake Montagne Tremblante Quebec

	5/3/3	76	8/2	/76
Depth (m)	Temp*		Temp	DQ
0	4.0	11.4	19.5	8.8
1	4.0	11.3	19.5	8.8
3			19.2	8.9
5	4.0	11.2	19.0	9.0
7			19.0	9.1
10			9.5	10.4
12			8.5	10.4
15			8.0	10.6
20	4.0	11.2	7.2	10.6
30	4.0	11.1	6.3	10.6
40	4.0	11.0	6.0	10.7
48	4.0	10.9		
50			5.5	10.7
60			5.5	10.6
73			5.5	10.4
74	4.0	11.8		

^{*} All temperatures are in °C.

^{**} DO is measured in mg/ℓ .

Lake Trois Montagne Quebec

	5/3	/76	8/	3/76
Depth (m)	Temp*		Temp	DO
0	5.5	10.6	20.0	9.4
1	5.5	10.7	20.0	9.5
5	5.3	10,5	19.5	9.7
10	5.2	10,4	7.7	10.5
20			5.9	9.5
30	4.5	9.7		~-
40	4.3	9.6	5.5	9.1
48	4.2	9.3	5.5	8.8

^{*} All temperatures are in °C.

^{**} DO is measured in mg/ℓ .

Lake Labelle Quebec

	5/5	/76	8/	4/76
Depth (m)	Temp*		Temp	DO
0	5.2	10.4	20.0	8.8
1	5.2	10.4	26.0	8.9
3			19.9	9.0
5	5.3	10.4	19.4	9.0
7			14.5	9.1
8			12.0	9.3
10	5.1	10.4	10.0	9.6
15			8.3	10.0
20	5.2	9.8	7.0	10.0
30			6.5	9.9
40	5.0	10.0	6.1	9.8
48	4.6	9.4		
50			6.1	9.7
54			5.3	9.6

^{*} All temperatures are in °C.

^{**} DO is measured in mg/ℓ .

Lake Sieze Iles Quebec

	5/5/	76	7,	/29/76
Depth (m)	Temp*		Temp	DO
0	5.4	10.2	21.3	9.2
1	5.4	10.2	21.3	9.2
4			20.5	9.4
5	5.4	10.2		
6			16.8	11.1
8			10.7	10.3
10	5.3	10.0	8.8	9.4
20		***	6.5	8.2
30	4.8	9.3	5.3	8.5
40	4.3	8.4	5.0	8.2
47			5.0	7.8
48	4.1	8.2	5.0	7.8

^{*} All temperatures are in °C.

^{**} DO is measured in mg/l.

Cayuga Lake (Sampling Stations)

	New Yol Milliken Cer	ntral	
Date	Depth (m)	Temp*	
10/23/70	0	11.0	10.6
	5		10.6
	10	10.8	10.4
	30	9.0	10.4
11/2/71	0	15.0	9.6
	5	15.0	9.9
	120	6.0	9.8
8/2/72	120	5.5	9.1
8/14/72	120	5.5	11.7
8/22/72	120	5.0	9.1
9/21/72	120	4.3	10.1
	Glenwoo	d	
Date	Depth (m)	Temp	DO
7/31/72	75	5.5	11.3
8/9/72			11.2
8/16/72			11.2
8,'24/72	\checkmark	\bigvee	11.7
	Taughannock	Central	
Date	Depth (m)	Temp	DO
10/23/70	0	10.5	10.8
	5		10.7
	10	10.0	10.6
	30	8.6	10.4
11/21/71	0	15.5	10.0
	5	15.5	10.5
	113	10.0	9.8
10/5/71	0	17.5	10.0
	(Continu	ed)	

^{*} All temperatures are in °C.

^{**} DO is measured in mg/ ℓ .

Cayuga Lake (Concluded)

	Taughannock Cen	tral (Concluded)	
Date	Depth (m)	Temp	DO
10/5/71	5	17.5	10.3
(Con't)	10	17.8	9.8
	113		9.9
9/11/71	0	22.0	
	15	17.0	7.7
	21	10.0	9.3
	107	4.5	5.7
7/31/72	113	5.0	11.1
8/7/72	į	5.0	10.0
8/14/72		5.0	10.3
8/22/72		5.5	10.7
9/21/72	V	4.3	9.8
	Shel	drake	
Date	Depth (m)	Temp	_ <u>DO</u> _
10/5/71	0		9.9
	5		8.7
	10	18.0	10.0
	118.5	8.0	9.0
7/8/72	0	25.0	8.0
	5	22.0	8.1
	10	19.0	8.4
	118.5	6.0	3.4
8/2/72		5.0	7.8
8/22/72		5.0	7.9
9/21/72	\checkmark	5.0	11.0

Cayuga Lake (Taughannock Station) New York

/50	00	4.5	0.9	9.9	7.75	8.2	8.15	8.5	8.35	9.7	7.75	8.6	10/20/50	00	11.3	;	11.2
1/28/50	Temp	20.6	18.9	14.4	6.67	6.11	5.56	5.00	1	ł	1	1	10/2	Temp	13.9	13.3	13.3
,50	00	6.9	9.9	7.35	8.5	7.05	7.45	7.4	ł	1	Į,	1	/50	00	9.45	9.35	8.95
7/11/50	Temp	18.9	16.7	9.44	7.78	6.11	5.56	5.00	1	ł	1	ł	9/20/50	Temp	18.9	18.3	16.7
50	DO	0.9	7.05	7.8	8.0	8.3	8.9	9.8	i	1	!	ł	9/6/50	00	0.6	9.0	10.8
7/7/50	Temp	18.9	17.8	11.7	6.67	5.56	5.00	5.00	ł	ł	1	1	/9/6	Temp	21.1	20.6	7.78
/50	DO	9.7	8.1	8.1	8.5	8.05	9.8	8.4	1	1	¦	ŀ	8/29/50	00	8.8	8.75	8.85
6/27/50	Temp	17.2	12.8	7.78	6.11	6.11	5.00	5.00	ł	!	1	1	8/29	Temp	21.7	20.0	13.9
/50	00	7.7	7.55	7.5	7.8	ł	8.65	8.7	1	;	ł	ł	8/18/50	DO	9.9	ŀ	6.9
6/23/50	Temp	15.0	10.0	8.33	7.22	6.11	5.56	5.00	!	;	;	ļ	8/18	Temp	22.8	18.9	13.9
/50	D0**		8.0	8.0	!	1	1	1	1	ł	}	1	/50	8	6.85	;	6.85
6/21/50	Temp*	13.3	10.0	6.67	5.56	5.00	5.00	5.00	}	i	ł	1	8/11	Temp	22.8	20.0	13.9
	Depth (m)	0	10	20	30	07	50	09	70	08	06	100		Depth (m)	0	10	20 13.9 6.85 13.9 6

* All temperatures are in $^{\rm O}{\rm C}$.

** DO is measured in mg/ℓ .

Cayuga Lake (Continued)

10/20/50	20	;	11.55	ţ	11.25	ł	1	ł	i	/51	CA CA	11.07	1	11.22	;	11.56	į	11.56
10/2	Temp	10.6	6.67	6.11	5.56	ł	i	ł	i	6/21/51	Temp	14.4	10.6	8.33	6.11	5.56	5.00	5.00
/50	8	ļ	11.0	1	11.55	1	10.7	ł	10.55	/51	20	11.47	11.76	11.81	ł	11.81	1	11.86
9/20/50	Temp	10.6	7.78	6.67	5.56	ł	1	;	ļ	6/12/51	Temp	11.7	10.0	10.0	7.78	7.22	6.67	6.11
50	00	1	11.75	i	12.1	1	11.9	1	11.45	/51	00	12.16	1	11.86	ļ		i	11.86
05/9/6	Temp	6.11	5.56	5.56	5.00	ļ	1	1	į	5/22/51	Temr	13.9	6.11	6.67	5.56	5.00	4.44	4.44
/50	00	!	10.8	ł	10.8	i	10,95	1	9.5	/51	00	10.01	ł	11.76	ł	11.86	ł	11.86
8/29/50	Temp	7.78	6.67	6.11	5.00	ł	ì	!	!	5/15/51	Temp	8.33	6.67	6.67	6.11	5.56	5.56	77.7
1/50	00	;	8.35	ļ ļ	8.65	1	1	!	ļ	11/14/50	00	11.65	ļ	11.35	ļ	11.35	1	11.55
8/18/50	Temp	8.33	6.67	5.56	5.00	1	1	1	ŀ		Temp	10.6	10.6	10.6	10.6	10.6	7.78	6.11
8/11/50	DO	!	8.4	1	8.5	ļ	8.5	1	8.3	10/27/50	00	11.15	ł	10.8		11.15	ļ	5.56 11.25
8/11	Temp	7.78	6.11	5.56	5.00	1	1	ļ	}	10/2	Temp	12.8	12.8	12.8	12.2	7.22	6.11	5.56
	Depth (m)	30	40	50	09	70	80	06	100		Depth (m)	0	10	20	30	07	50	09

Lake Cayuga (Continued)

/51	00	;	11.66	;	11.47	/51	00	9.39	1	60.6	;	10.48	1	11.07	ł	11.27	ł	10.28
6/21/51	Temp	5.00	4.44	4.44	77.7	8/20/51	Temp	24.4	17.8	12.8	8.33	6.11	5.56	5.56	1	;	;	1
51	20	!	11.86	!	!	T,	200	8.7	i	9.29	i	10.63	1	10.97	;	11.17	1	10.97
6/12/51	Temp	5.00	4.44	4.44	!	8/8/51	Temp	20.6	17.8	12.8	9.44	7.78	6.11	5.56	5.56	5.00	5.00	5.00
/51	00	1	11.86	1	11.61	51	00	8.8	į	9.14	1	10.67	i	10.97	}	11.32	}	10.67
5/22/51	Temp	4.44	47.4	4.44	77.7	8/1/51	Temp	24.4	18.9	14.4	9.44	6.67	5.56	5.56	5.56	5.56	5.00	5.00
/51	D0	1	11.96	1	11.66	/51	2	9.14	!	69.6	1	10.77	¦	11.17	1	11.12	ļ	10.72
5/15/51	Temp	3.89	3.89	3.89	3.89	7/27/51	Temp	23.3	19.4	12.2	9.44	6.67	5.56	5.56	;	!	1	1
4/50	D0	1	11.75	ł	11.55	/51	DO	8.8	ŀ	9.54	;	10.87	1	10.97	!	10.92		10.67
11/1	Temp	1	1	ł	}	7/21	Temp	21.1	15.6	10.0	7.22	6.11	5.56	5.00	5.00	5.00	5.00	5.00 10.6
7/50	00	1	ļ	1	;	/51	00	9.79	}	9.88	1	10.72	ļ	11.42	1	11.37	;	11.07
10/2	Temp	ł	;	;	1	7/11	Temp				;	1	;	ł	ł		1	11.07
	Depth (m)	70	80	06	100		Depth (m)	0	10									100

Cayuga Lake (Continued)

/52	8	10.8	10.9	12.1	ŀ	11.3	ł	11.5	1	1	;	12.2		90				
5/23/52	Temp	8.89	7.78	7.22	6.67	6.11	6.11	5.00	į	ł	i i	!		Temp				
/52		10.3	ļ	10.1	1	1	1	10.4	;	i	1	10.4	58	00	10.70	15.0 9.22	9.48	9.9 10.14
4/26/52	Temp	4.44	4.44	4.44	4.44	4.44	77.7	4.44	;	1	¦	ł	7/2/	Temp	16.2	15.0	11.0	6.6
/52	00	10.7	10.6	1	ļ	ł	}	I	1	1	;	1	/52	00	9.15	9.1	8.8	1
3/18/52	Temp	2.78	2.78	2.78	2.78	2.78	2.78	2.78	ľ	}	ļ	ł	9/24/52	Temp	19.4	20.0	18.9	10.6
3/51	D0	8.6	1	ļ	}	1	¦	ł	1		1	;	/52	00	ر 1	7.9	9.2	
11/13/51	Temp	10.0	10.0	9.44	7.22	6.67	6.11	5.56	5.56	5.56	5.56	5.56	8/15/52	Temp	22.8	21.7	12.2	9.44
8/51	00	8.6	}	8.9		8.6	ł	6.6	;	10.2		10.1	/52	00	7.7	9.8	0.6	1
10/18/51	Temp	15.0	13.9	13.9	9.44	7.22	6.67	5.56		1	1	1	7/31/52	Temp	23.3	21.7	11.7	7.22
/51	00	9.39	1	9.24	ļ	10.72		10.92	!	10.97	1	10.28	/52	00	7.8	0.6	9.1	8.33
8/29/51	Temp	25.1	20.6	12.8	7.78	6.11	5.56	5.56		1	1	1	6/24	Temp	15.6	12.2	77.6	8.33
	Depth (m)	0	10	20	30	07	50	09	70	80	06	100		Depth (m)	0	10	20	30

Cayuga Lake (Continued)

/52	10.4		10.95		i i	10.4		0.6	9/6/68 Temp DO	8.70	7.95	8.92	10.24	10.10	10.70	11.25	10.78	10.30	11.20	98.6	8.10
9/24/52 Temn DC	7.22	6.11	6.11	73 3	3.30	2.00	5.00	5.00	9/6/ Temp	20.2	19.1	6.6	6.2	5.3	4.4	ł	1	1	!	!	1
/52	10.0	1	30.5) }	!	9.5	1	8.5	8/20/68 Temp DO	89.8	8.63	9.57	10.48	10.80	¦	10.93	10.90	10.55	11.40	10.50	8.38
8/15 Temp	7.78	6.11	3,5,6	ט ט	0.00	2.00	5.00	5.00	8/20 Temp	20.4	17.8	10.1	6.4	5.6	5.1	4.5	4.5	1	1	1	!
/52 D0	9.6	1	8.6		¦ '	9.5	ł	9.2	8/8/68 8 Temp DO Tem	8.74	8.51	9.53	10.81	11.05	10.80	11.30	10.80	1	10.20	10.20	8.47
7/31/52 Temp DO	6.11	5.56	5.00		00.0	2.00	5.00	5.00 9.2	8/8/ Temp	20.7	17.8	10.4	6.9	5.6	4.7	4.3	4.1	1	1	1	1
/52 D0	9.4	¦	7.6		۱ ;	9.6	1	1	/68 DO	10.65	9.56	10.01	10.62	11.10	}	!	!	1	i		1
6/24 Temp	7.22	6.67	6.11		!	}	1		7/16/68 Temp DO	23.1	14.0	10.0	8.5	5.5	i	;	1	ł	1	1	-
Depth (m)	700	50	09	02	2 6	80	06	100	Depth (m)	0	10	20	30	07	50	09	70	80	06	100	110

Cayuga Lake (Continued)

769	00	11.70	ļ	;	11.80	11.53	;	11.67	11.50	i	11.40	11.50	i
1/21	Temp	3.5	3.5	3.4	3.5	3.5	3.5	3.5	.00 3.5 11.50	3.7	3.8	3.8	ł
89/9	00	10.22	1		10.10	10.10	ł	6.6	5.9 10.00	1	9.87	9.30	!
11/2	Temp	6.2	6.2	6.2	6.2	6.2	6.2	5.9	5.9	5.8	5.7	5.7	ŀ
4/68	00	9.78	9.65	6.63	9.42	9.60	10.40	96.6	10.00	10.50	9.95	8.75	7.50
11/1	Temp	9.6	8.6	10.0	8.4	7.4	6.9	6.3	0.80 5.8 10.00	5.2	4.5	4.5	!
89/0	00	9.15	!	96.8	9.31	9.70	10.12	10.20	4.6 10.80	10.20	9.90	8.40	8.45
10/3	Temp	11.7	12.8	12.8	10.7	8.7	7.0	5.1	4.6	ŀ	ł	1	1
17/68	00	9.58	8.76	8.58	9.36	10.05	10.60	10.66	5 10.50 4	10.30	1	8.45	6.70
10/	Temp	16.3	15.6	13.9	8.2	6.1	5.2	4.7	4.5	4.5	4.5	4.5	1
768	8	9.05	8.00	9.00	10.11	10.55	10.60	10.66	10.97	10.80	10.53	89.6	7.30
9/20	Temp	18.7	17.9	12.0	7.0	5.3	4.4	4.2	1	ł	!	1	}
	Depth (m)	0	10	20	30	70	50	09	70 10.97	80	06	100	110

Cayuga Lake (Concluded)

69/	8	12.13	;	ļ	12.23	12.25	2.8 12.35	12.35	1	1	12.25	12.30
1												
69/1	8	12.36	i	}	12.30	12,35	1.7 12.35	12.30	12.30	12.40	12.30	12.20
3/18	Temp	2.1	2.1	1.9	1.8	1.8	1.7	1.7	1.7	1.8	1.8	1.7
69/	20	12.20	}	1	12.26	12.35	2.0 12.25	12.25	12.10	1	12.25	12.20
2/17	Temp	1.6	1.6	1.6	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0
	Depth (m)	0	10	20	30	07	50	09	70	80	06	100

<mark>जन्मीत्राहरूमा विकास सम्बद्धार क्षात्रमा क्षात्रमा अवस्थात्</mark> कार्यक स्वत्रमा स्वत्रमा स्वत्रमा स्वत्रमा स्वत्रम

Finger Lakes New York

	Otisco		
Date	Depth (m)	Temp*	DO**
4/23/73	s	11.0	11.9
	ъ	6.5	12.2
7/17/73	s	23.0	7.6
	Ъ	10.0	3.6
8/28/73	s	23.0	7.3
	Ъ	10.5	2.3
	Canadic	е	
Date	Depth (m)	Temp	DO
4/24/73	S	10.0	11.9
	Ъ	6.0	8.9
7/18/73	s	23.0	8.3
	ъ	8.0	6.1
8/28/73	s	24.0	8.9
	ъ	8.5	3.6
	Honeoy	е	
Dete	Depth (m)	Temp	DO
4/24/73	s	12.5	10.9
	Ъ	10.2	8.7
7/18/73	s	24.0	7.6
	b	22.4	6.7
8/28/73	s	25.0	10.3
	b	22.0	8.8
	Keuka		
Date	Depth (m)	Temp	DO
4/25/73	s	7.6	12.1
	Ъ	4.9	12.3
7/18/73	S	25.0	8.6
	Ъ	6.0	7.3
8/28/73	S	23.5	10.0
	b	5.7	7.9

^{*} All temperatures are in ${}^{\rm O}{\rm C}$. ** DO is measured in mg/ ℓ .

Finger Lakes (Continued)

		Seneca		
Date	Depth	(m)	Temp	_DO
4/28/73	s		5.6	12.7
	b		4.0	12.2
7/18/73	s		23.5	9.2
	b		4.0	10.2
8/28/73	s		23.5	8.9
	b		5.5	9.2
		Hemloc	ξ	
Date	Depth	(m)	Temp	DO
7/26/72			27.2	
9/13/72			9.5	2.0
4/24/73	s		11.4	9.7
	Ъ		7.0	11.3
7/18/73	s		22.8	9.1
	ъ		9.2	4,9
7/30/73			26.0	
8/28/73	s		24.2	9.5
	ъ		9.1	5.9
9/17/73			9.0	3.8
		Owasco	grapin disagonialitis saan spiradistiid rays valessaan dis digeneerings vaddistigung saabin di saardistiin sanaansiin siradistiid dikasaba daabtigaaga paraysiin	
Date	Depth	(m)	Temp	DO
7/21/72			26.3	
8/4/72			6.0	6.7
4/23/73	s		3 3	i2.9
	ь		4.8	12.9
7/9/73			24.4	
7/17/73	s		22.8	8.1
	ь		6.8	8.0

Finger Lakes (Concluded)

	Owasco (Con	tinued)	
<u>Date</u>	Depth (m)	<u>Temp</u>	20
8/28/73	s	23.5	8.4
	Ъ	6.4	8.9
9/25/73	~	6.4	6.5
	Skaneate	les	
Date	Depth (m)	Temp	DO
7/21/72	-	27.0	
9/20/72		6.0	8.3
4/23/73	s	6.0	12.7
	Ъ	4.5	12.8
7/17/73	s	22.3	8.2
	Ъ	6.0	11.1
7/25/73		6.0	10.4
8/14/73		23.5	~-
8/28/73	s	22,8	8.7
	ь	4.8	10.7